


Fohhn


Perform

PT-70


Rückwärtige Schalldämpfung

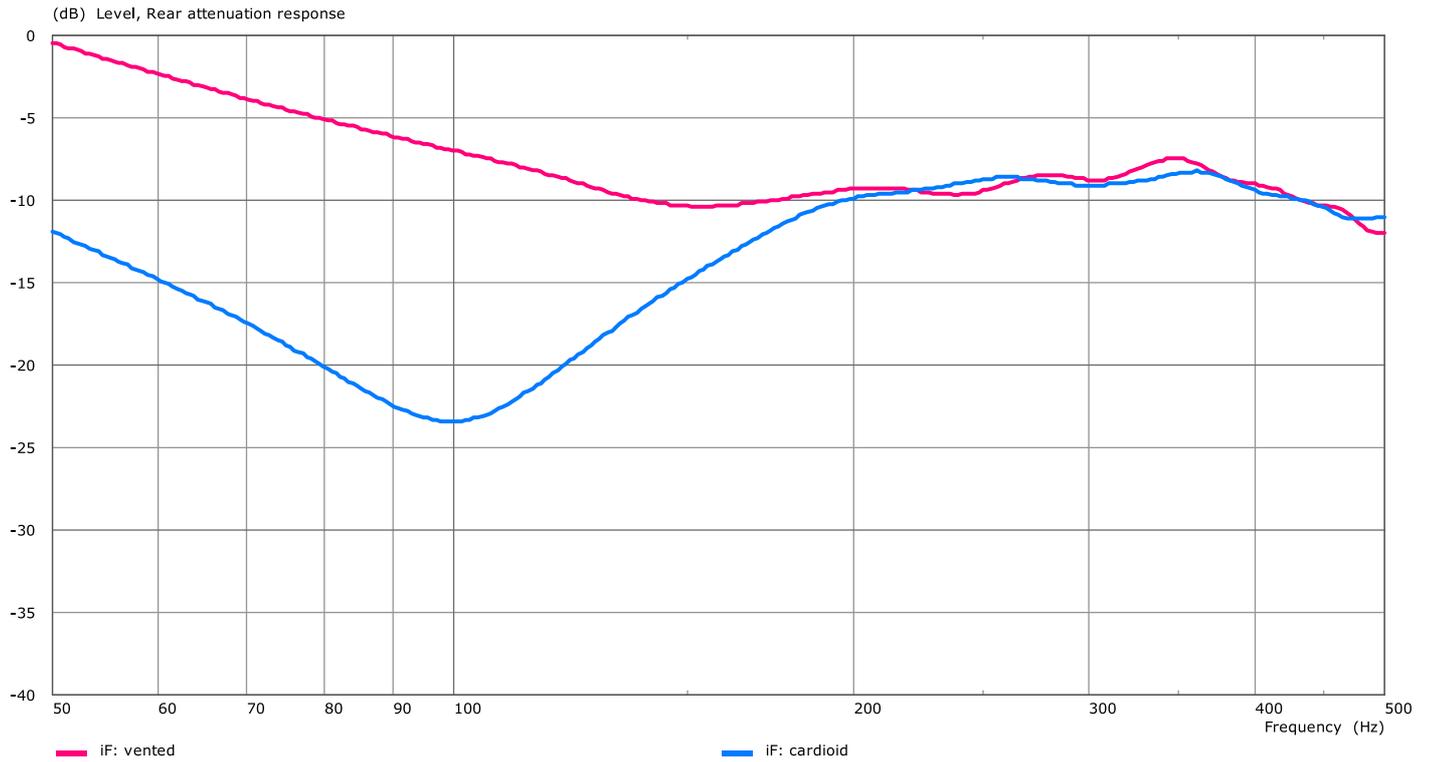


Bündelungsmaß 60° × 50° Version

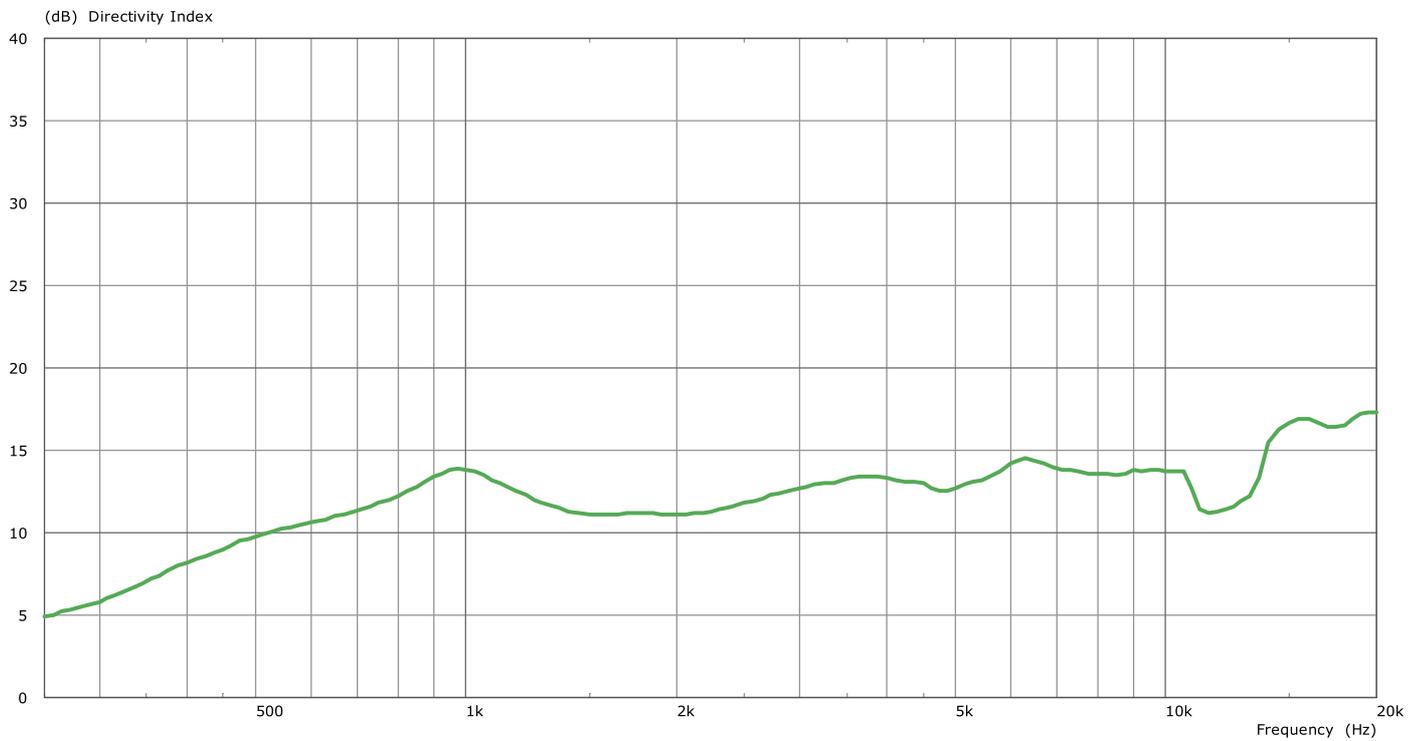


Bündelungsmaß 90° × 50° Version

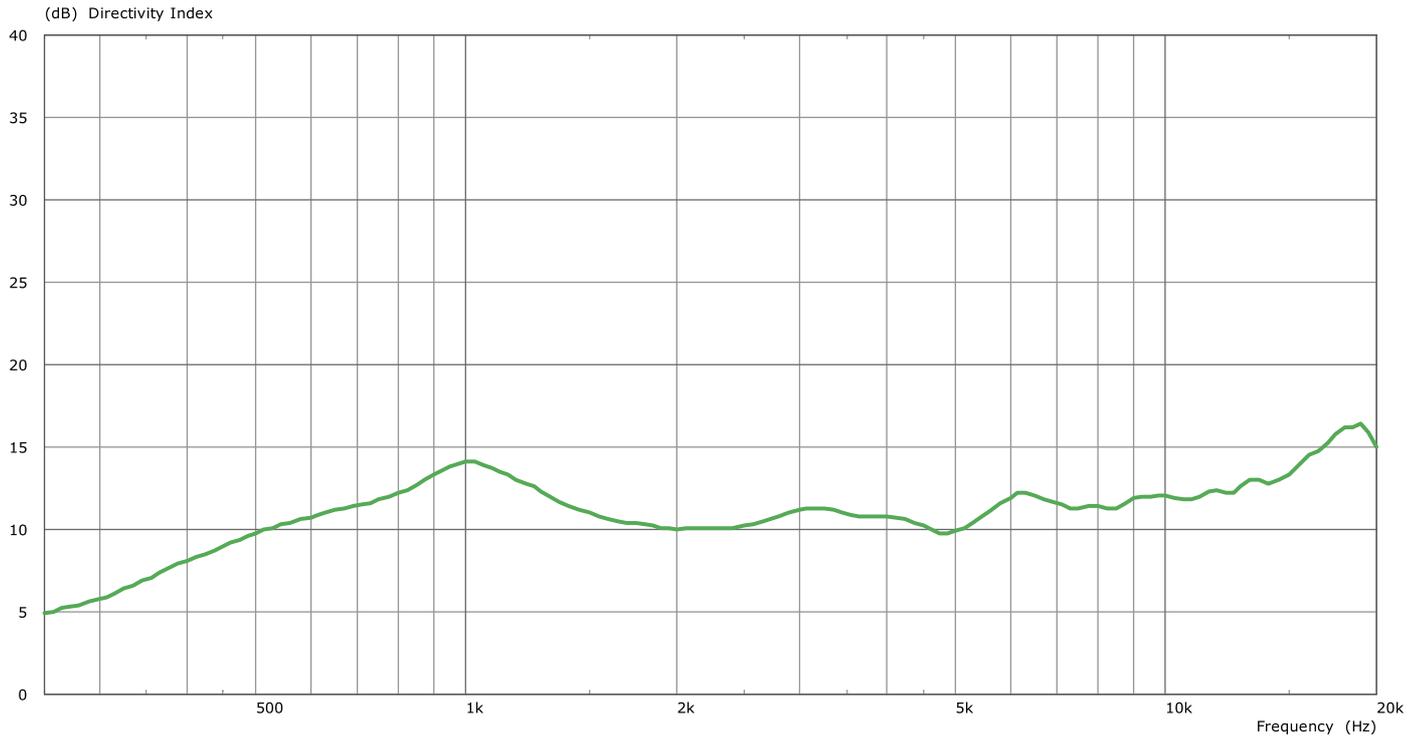



Frequenzgang 60° × 50° Version

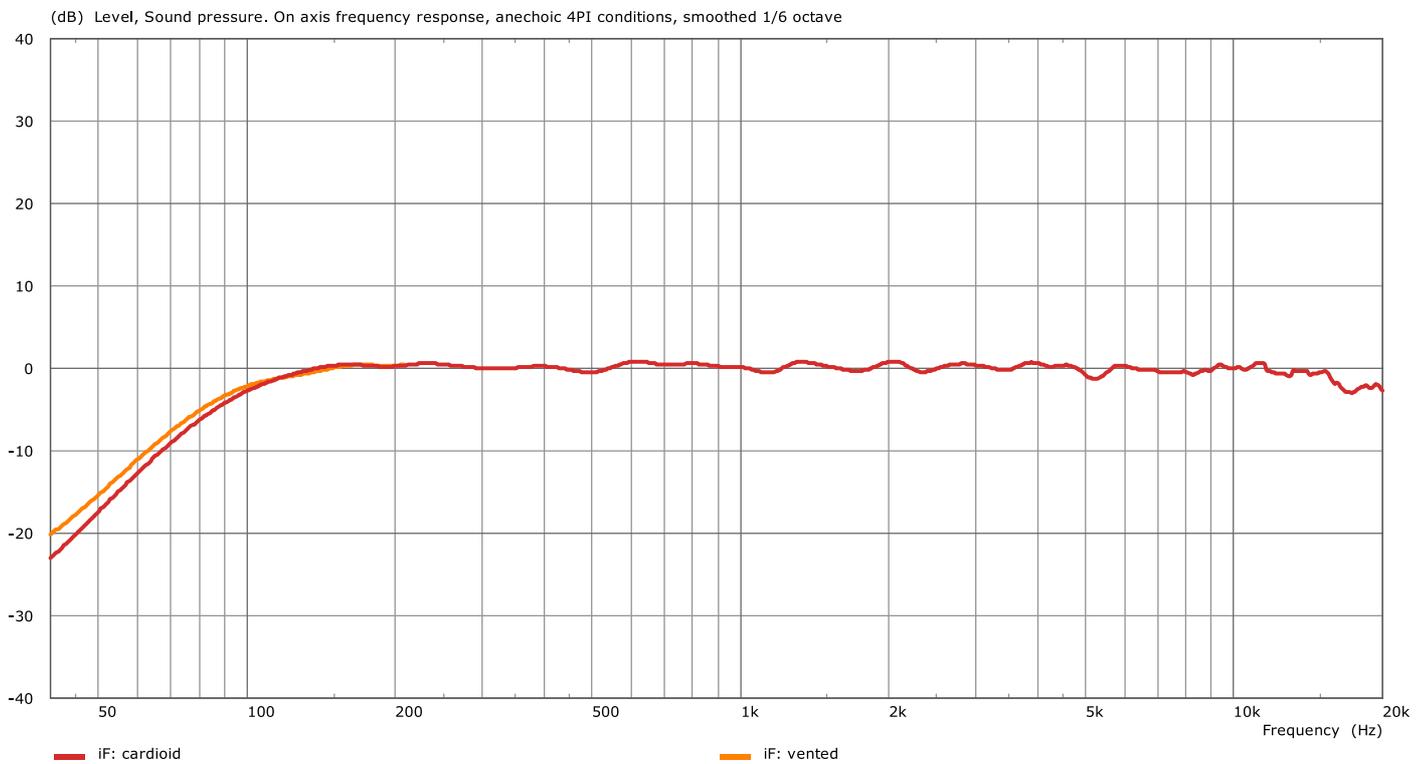

Frequenzgang 90° × 50° Version

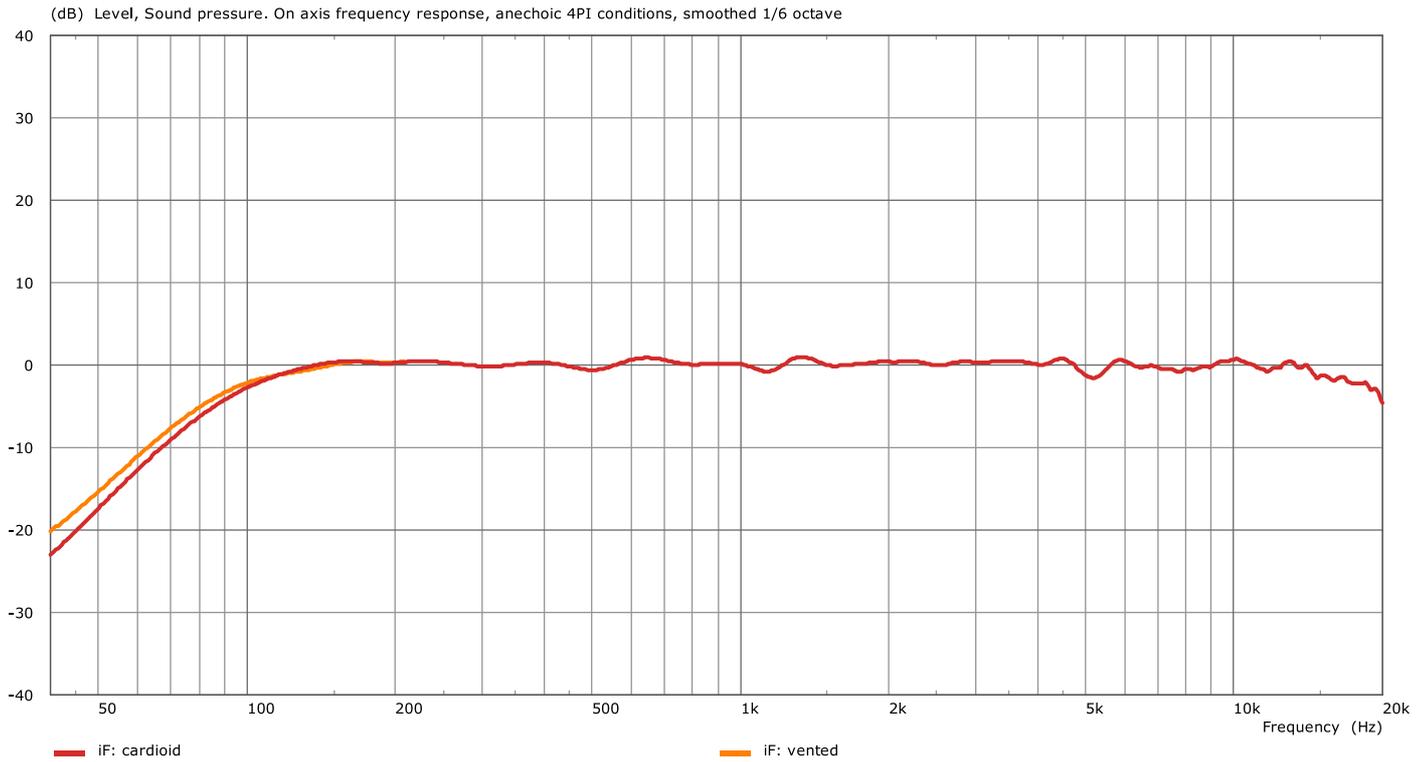


Polardiagramme 90° × 50° Version

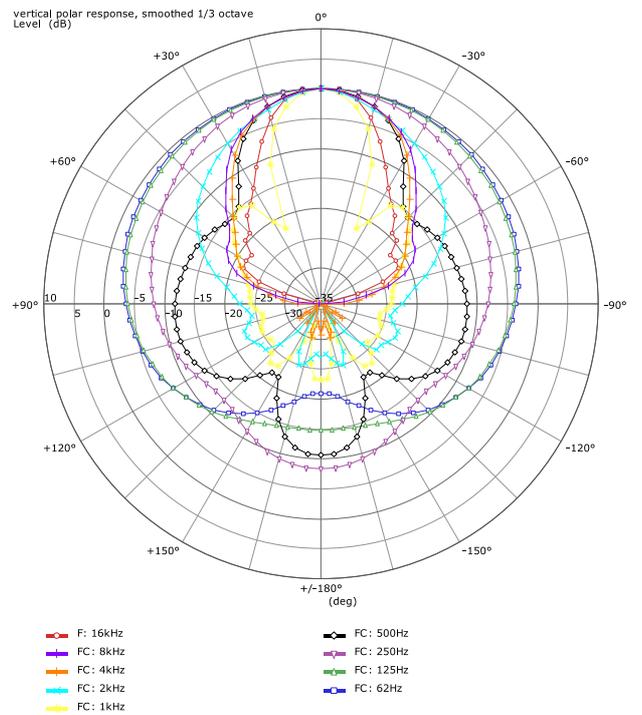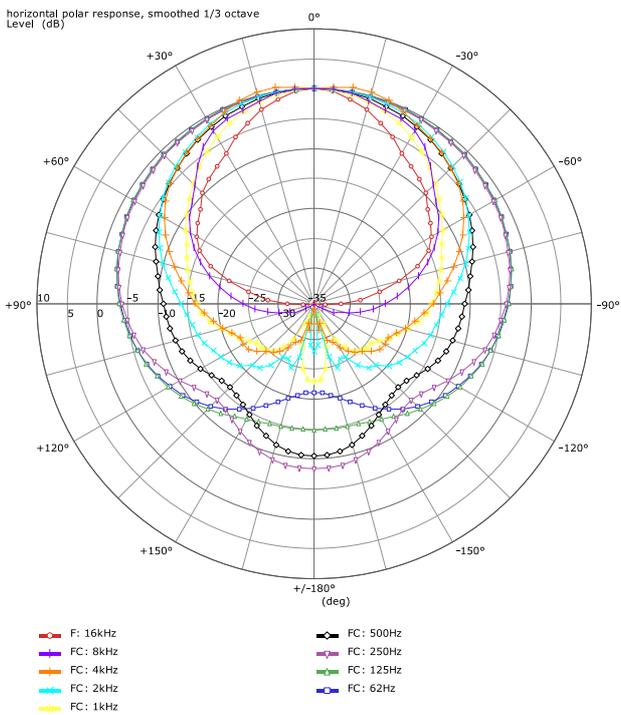


Polardiagramme 60° × 50° Version

horizontal polar response, smoothed 1/3 octave
Level (dB)

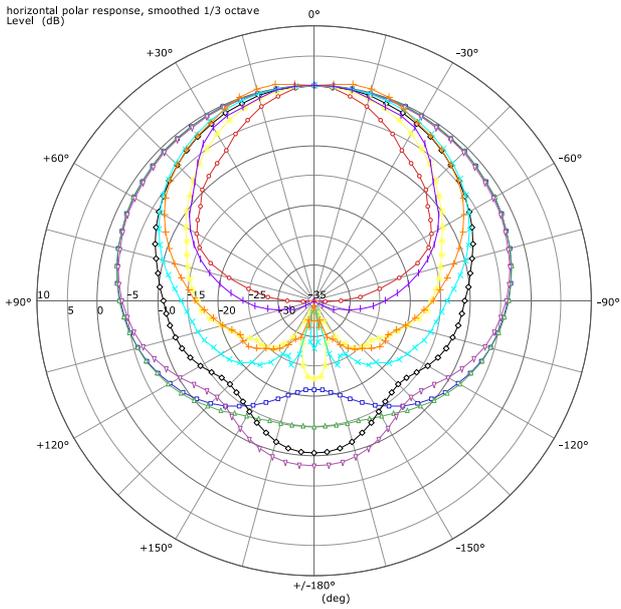


- | | |
|------------|-------------|
| — F: 16kHz | — FC: 500Hz |
| — FC: 8kHz | — FC: 250Hz |
| — FC: 4kHz | — FC: 125Hz |
| — FC: 2kHz | — FC: 62Hz |
| — FC: 1kHz | |

vertical polar response, smoothed 1/3 octave
Level (dB)

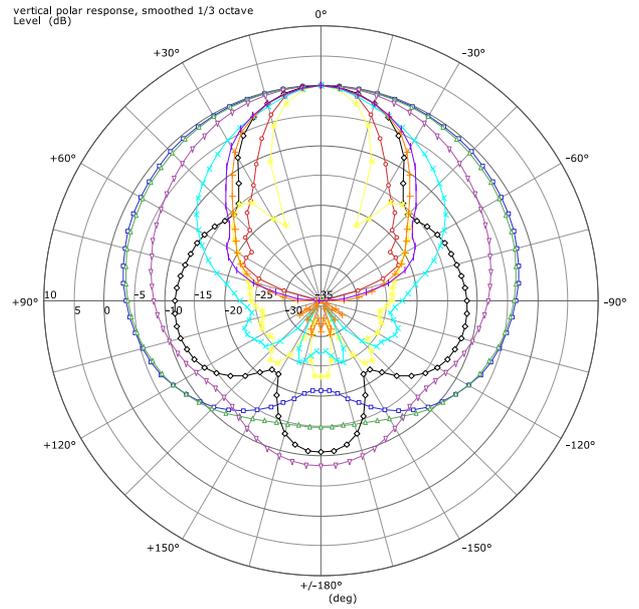


- | | |
|------------|-------------|
| — F: 16kHz | — FC: 500Hz |
| — FC: 8kHz | — FC: 250Hz |
| — FC: 4kHz | — FC: 125Hz |
| — FC: 2kHz | — FC: 62Hz |
| — FC: 1kHz | |


Isobaren horizontal 60° × 50° version

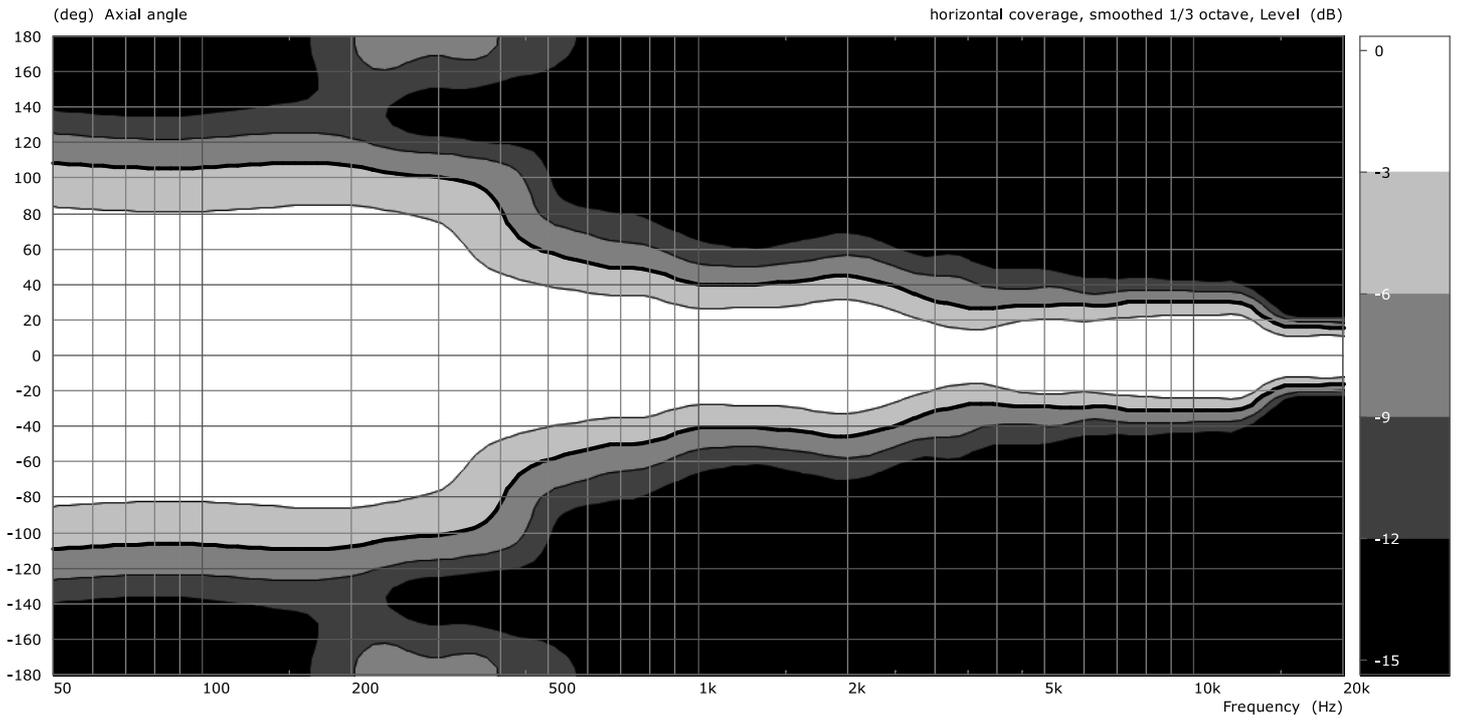


Isobaren vertikal 60° × 50° Version

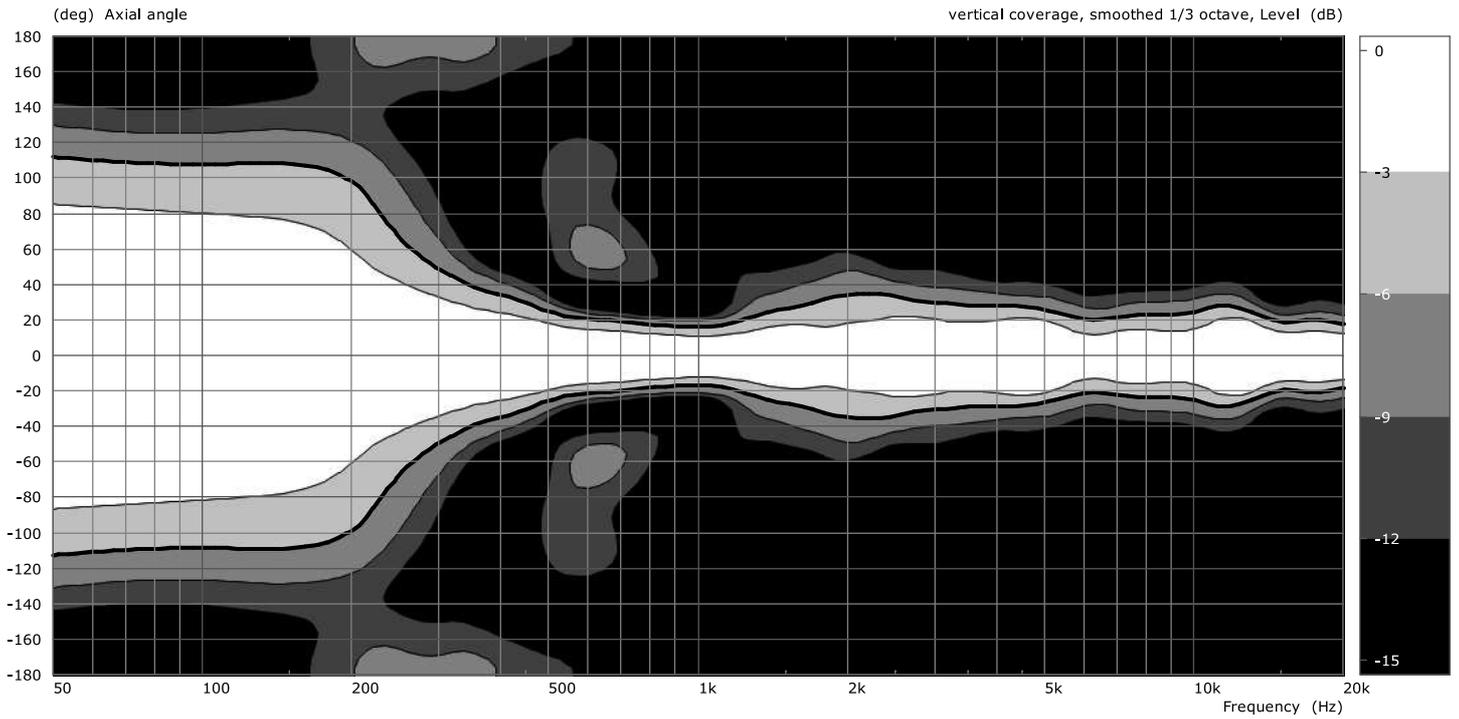

Isobaren vertikal 90° × 50° Version

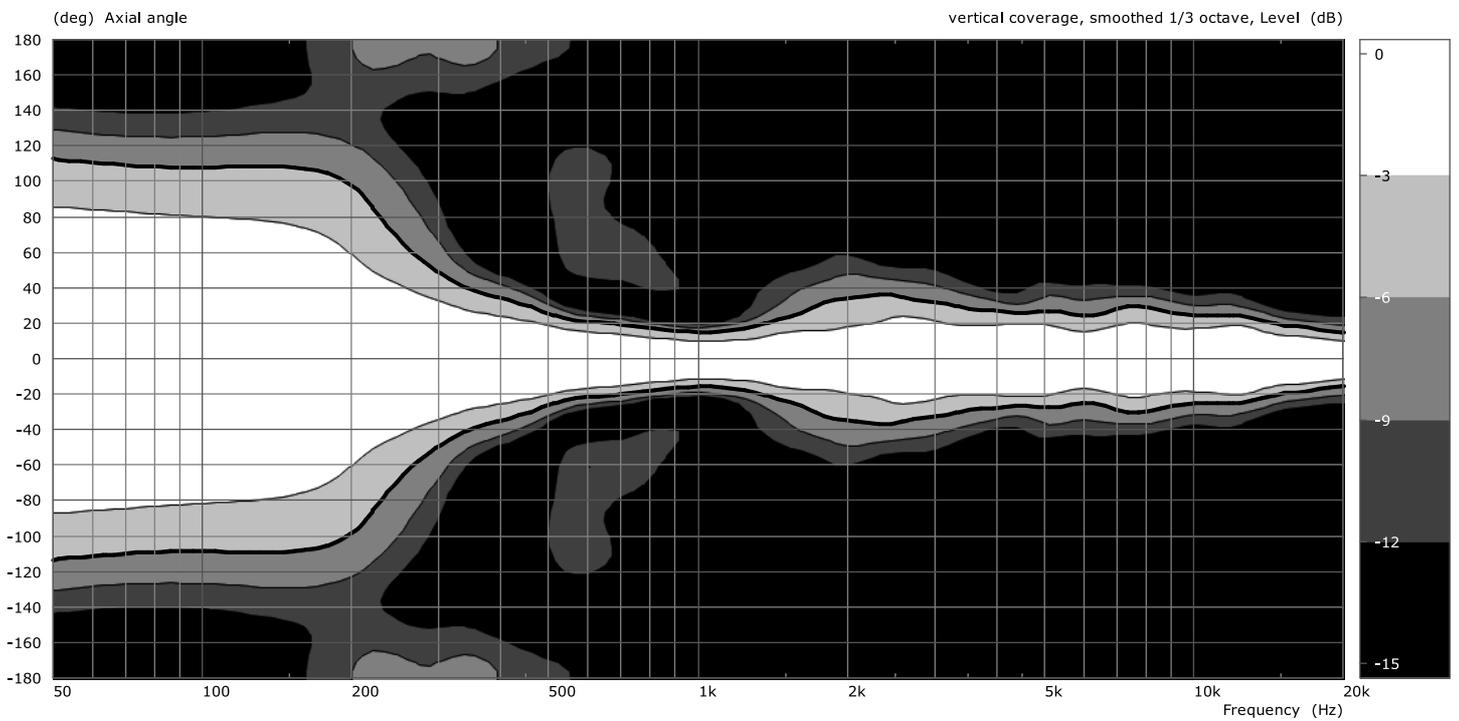

Isobaren horizontal 90° × 50° Version

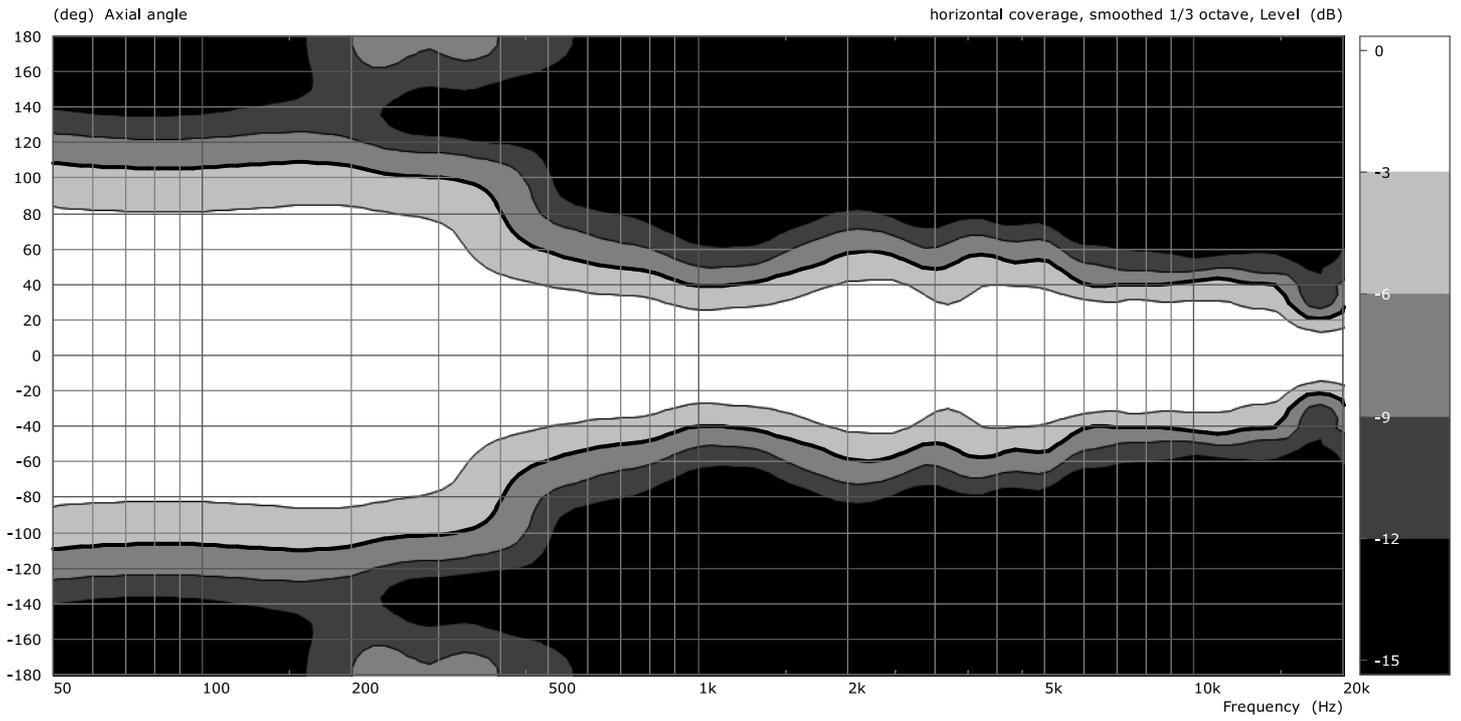

Fohhn Audio AG
Großer Forst 15
72622 Nürtingen
Deutschland

Tel. +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com

