


# Linea

## LX-501

Passive line source speaker for music and speech,  
4 × 6,5" / 4 × 1", 700 W, 132 dB SPL max., approx. 195  
× 1160 × 238 mm, mobile version

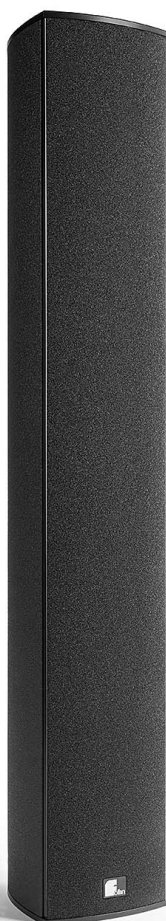

# Linea LX-501

The mobile LX-501 combines and optimizes the principles of line array technology in a compact yet powerful system. It achieves first-class directivity, even dispersion and a long reach. The unit can be placed inconspicuously in the room thanks to its slim design. The loudspeaker system can be optimally combined with passive and active subwoofers of the X and Perform series and delivers best results with Fohhn DSP power amplifiers.

## Main features

- 4 × 6.5" long excursion driver, 4 × 1" compression driver with Waveguide
- Nominal power rating: 700 W
- Dispersion: 100° × 20° (H × V)
- SPL max.: 132 dB
- High feedback resistance
- Connections: 2 × Speakon
- High-quality wooden enclosure (multiplex birch) with PU coating
- Available in RAL Classic, NCS or Pantone colors on request
- Versatile mounting and flying accessories
- In order to ensure performance and operational safety, Fohhn system amplifiers including the correct speaker preset are required.

Available with the following color options



Black

Equipped with the following Fohhn technologies



Fohhn Source  
Division  
Waveguide



Special colors  
optional



Weatherproof  
execution

# Technical data

## Electroacoustic features

acoustic design	passive hybrid line source speaker system, 2-way
power rating (nominal)	700 watts
power rating (program)	1400 watts
power rating (peak)	2800 watts
components	4 × 6.5" long excursion chassis, attached compression chamber with phase board, 4 × 1" compression drivers on Fohhn-Waveguide with self-resetting IPC-HF protection, fully neodymium
sensitivity	98 dB
maximum SPL	132 dB
frequency range	75 Hz – 20 kHz
2-way design	yes
nominal impedance	8 ohms
nominal dispersion (h × v)	100° × 20°

## Physical features

enclosure	multiplex birch plywood, Aluminium
front design	acoustic foam in enclosure colour
protection grille	steel grille, ball impact resistant, powder-coated
weight	23 kg
standard colours	black or white
handles	integrated handle on top and bottom, 1 × unscrewable handle on rear side
mounting points	10 × M6 and 2 × M8 thread
weather protection	polyurethane coating and water-repellant speaker cone impregnation
connectors	2 × NL4 Neutrik Speakon
dimensions (W × H × D)	approx. 195 × 1160 × 238 mm

## Optional features

optional colours	RAL Classic / NCS / Pantone on request
------------------	--

## CAAD simulation data

simulation data	EASE, Ulysses, Fohhn Designer
-----------------	-------------------------------

power rating (nominal/program): according to IEC-60268-5 (long term/short term)

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range

sensitivity: 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 m under anechoic fullspace conditions

frequency range: -10 dB under anechoic halfspace-conditions

weight: net weight without optional equipment

Intelligent Protection Circuit (IPC): voltage-controlled semiconductor circuit protecting the HF-driver against overload highly effective and with very short attack time

cut-off frequency: -10 dB under anechoic halfspace-conditions with speaker preset

heat dissipation: pink noise, 6 dB crest, 1/4 Pmax

**Fohhn Audio AG**  
**Großer Forst 15**  
**72622 Nuertingen**  
**Germany**

**Phone +49 7022 93323-0**  
**Fax +49 7022 93324-0**  
**[www.fohhn.com](http://www.fohhn.com)**  
**[info@fohhn.com](mailto:info@fohhn.com)**

