


Focus Modular

DLM-300

Passive low-mid extension module, 4 × 6.5", 500 W, 126 dB SPL max., 224 × 700 × 527 mm



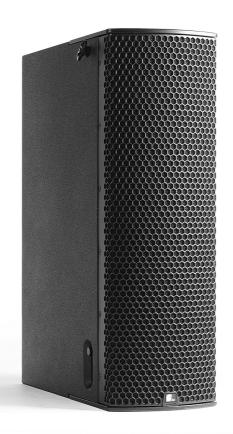





The DLM-300 is the low-mid extension to the FM/I and DFM modules.



Main features

- 4 × 6.5" long excursion driver
- High power rating: 500 W (nominal)
- SPL max.: 126 dB
- Fast and safe rigging thanks to the built-in Fohhn Quicklock
 System
- Standard with scratch-resistant PU coating
- Available in all RAL Classic colours
- In order to ensure performance and operational safety, Fohhn system amplifiers including the correct speaker preset are required.

Available with the following color options





Black

Equipped with the following Fohhn technologies



Special colors optional



Weatherresistance

Technical data

Electroacoustic features

acoustic design	direct radiating, vented design
power rating (nominal)	500 watts
components	4 × 6,5" long excursion driver
maximum SPL	126 dB
cut-off frequency	48 Hz
nominal impedance	4 ohms

Physical features

enclosure	multiplex birch playwood, Aluminium
connectors	1 × Neutrik NL4 Speakon, recessed
dimensions (w × h × d)	224 × 700 × 527 mm
weight	approx. 32 kg
protection grille	hexagonal perforated steel grille, powder-coated in enclosure colour, backed by acoustically transparent foam
mounting points	integrated rigging system

Optional features

optional colours	RAL Classic / NCS / Pantone on request
optional weather protection	water-repellent speaker cone impregnation

CAAD simulation data

power rating (nominal/program): according to IEC-60268-5 (long term/short term)

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range, with speaker preset

weight: net weight without optional equipment

cut-off frequency: -10 dB under anechoic halfspace-conditions with speaker preset

Fohhn Audio AG Großer Forst 15 72622 Nuertingen Germany Phone +49 7022 93323-0 Fax +49 7022 93324-0 www.fohhn.com info@fohhn.com

