

Data sheet

LF-120



Linea Focus

The next generation of electronically steerable line array systems.





LF-120

8x 4" neodymium loudspeakers,
8x CLASS D amplifiers,
8x DSP processors, Length: 1.20 m

The Linea Focus family

The innovative, finely tuned Linea Focus family differentiates itself from other products because of its column length. This is due to the number of integrated loudspeakers, amplifiers and DSP channels, which enable each individual speaker to be electronically controlled.

The flagship LFI-450, for example, contains 32 integrated loudspeakers, 32 amplifiers and 32 DSP channels. The vertical sound inclination angle can be adjusted between $-40^{\circ}/+40^{\circ}$ and the vertical beam width between 0° to 90° . Using Fohhn's intuitive software, adjustments are made in unbelievably fine and precise 0.1° steps.

An outstanding feature of the Linea Focus series is Fohhn's **„Two Beam Technology“**. This allows the speakers to generate two separate beams in their vertical dispersion range, providing simultaneous and focussed coverage of different audience areas, such as stalls and gallery.

The **acoustic centres** of both beams can be set anywhere from 0% (at the bottom of the column) to 100% (at the very top), making the speaker suitable for use in the most challenging acoustic conditions.

A further unique feature is Fohhn's new **“Side Lobe Free Technology”**, a special algorithm developed in house to suppress the unwanted side lobes that will inevitably occur in the beam. This results in a more directional sound and significantly improved speech intelligibility.

The different lengths of the Linea Focus models determine their acoustic efficiency. The longer the line array, the longer its reach and also its effectiveness in the control of low frequencies. Multiple Linea Focus systems can be networked together to enable monitoring and control from a central location.

Linea Focus – Outstanding for 5 good reasons

1. Superb sound quality in challenging acoustic environments

Linea Focus takes sound reproduction of both speech and music to the next level. The speakers' sound dispersion characteristics can be adjusted to suit the room conditions, avoiding unwanted reflections and providing even coverage of all audience areas. Because of this, it's possible to achieve superb speech intelligibility and a clear cohesive image, even in the most demanding acoustic conditions.

In comparison: Conventional PA systems have more permanently defined sound dispersion characteristics. These are usually either too wide, or they lack cohesion and cannot be specifically adjusted to suit particular room conditions. It's also unnecessary for sound to be focussed in places where there is no audience. This sound often reflects off areas like the ceiling, causing a delay on its return. To the listener, this kind of reflection can make the sound appear “washy” or “roomy”, with a noticeable deterioration in speech intelligibility. In this respect, the Linea Focus series is revolutionary: Specifically targeting the sound means that unwanted room reflections can be avoided.

2. Real-time sound control

Perfect control equals perfect results. Fohhn's user-friendly software enables real-time control of the speakers' sound dispersion characteristics. This allows sound to be focussed quickly and accurately on each particular audience area, giving outstanding results with both fixed installations and live performance systems. With most sound projects, time is often a decisive factor in determining their eventual success or failure. Because the loudspeaker system is invariably installed at the end of a construction project, or live set-up, time may be limited to quick and rudimentary adjustments and sound checks. Being able to control the sound dispersion in real-time makes the set-up considerably easier.

LF-120 active, electronically steerable line array systems.

4. Outstanding reproduction of speech and music


Linea Focus also establishes a new benchmark for the reproduction of speech and music. The high-powered speakers' exclusive development and innovative digital technology produces a dynamic, natural sound quality. Speech, AV productions and live music are all superbly reproduced with Linea Focus systems. Each separate loudspeaker is individually equipped with one of the latest generation CLASS D DSP amplifiers, producing 100 W path power per channel. A Linea Focus LF-120 system, for example, has 800 W of available amplifier power.

If higher bass sound pressure levels are called for, the Linea Focus system can easily be combined with a Fohhn active or passive subwoofer. To target sound more effectively in the low frequency range, it's also possible to create a bass array by combining several subwoofers and their related DSP technology.

The Linea Focus systems' extraordinary electronic control capabilities also allow the speakers to be used in combination with Fohhn subwoofer systems. Electronically steering each separate DSP-controlled subwoofer enables more precise control of its sound dispersion characteristics. This in turn gives a more even reproduction of low frequencies, which significantly improves the overall sound image.

5. Integration into any architectural setting

Designed for perfection, the slim, elegant Linea Focus speakers integrate into any setting. Housings are available in all standard RAL colours. The speakers' electronic control functionality enables them either to be mounted flat against the wall, or installed directly in the wall to blend unobtrusively with the room interior. Only the most important things will be noticed: the room and the sound.

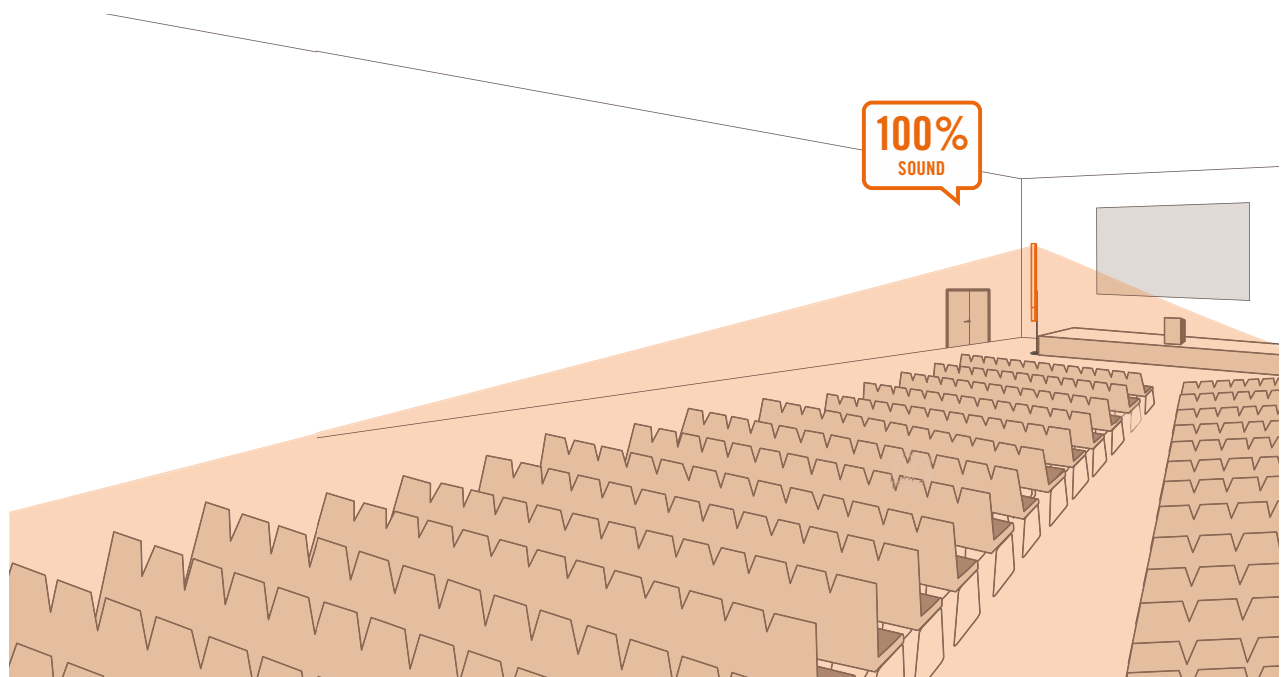

Linea Focus active, electronically steerable line array systems.



THE LINEA FOCUS PRODUCT FAMILY.

TECHNOLOGY
BY FOHHN®


The next generation of electronically steerable line array systems.

4.5 m
Linea Focus LFI-450

3.5 m
Linea Focus LFI-350

2.2 m
Linea Focus LFI-220/LF-220

1.2 m
Linea Focus LFI-120/LF-120

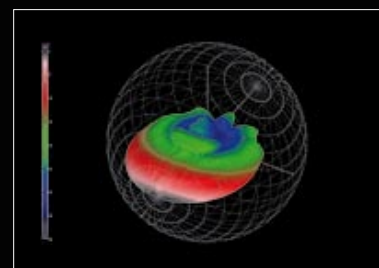

Fohhn Linea Focus 3D Directivity Balloon

ENGINEERED FOR **ARCHITECTURE**
AND **LIVE SOUND.**

Linea Focus active, electronically steerable line array systems.


Even sound distribution

With Linea Focus, even sound distribution is guaranteed throughout the venue, from warm, pleasant sound at the front, to clarity and detailed intelligibility right at the back. What's more, significantly fewer speakers are required to achieve perfect room coverage. As a true line array system, Linea Focus produces its sound in the form of a cylindrical wave. Unlike conventional systems, the sound pressure level within the cylindrical wave only decreases by 3 dB, instead of 6 dB, as the distance doubles. This groundbreaking feature, combined with the ability to electronically control the speakers' sound dispersion, has set new standards in sound quality.

Planning support


For planning ingenieurs we offer a plugin (DLL) of Fohhn Audio Soft for EASE acoustic simulation program.

For further information, please contact our planning engineers on info@fohhn.com.



The different lengths of the Linea Focus models determine their acoustic efficiency. The longer the line array, the longer its reach and also its effectiveness in the control of low frequencies.

SIZE MATTERS.

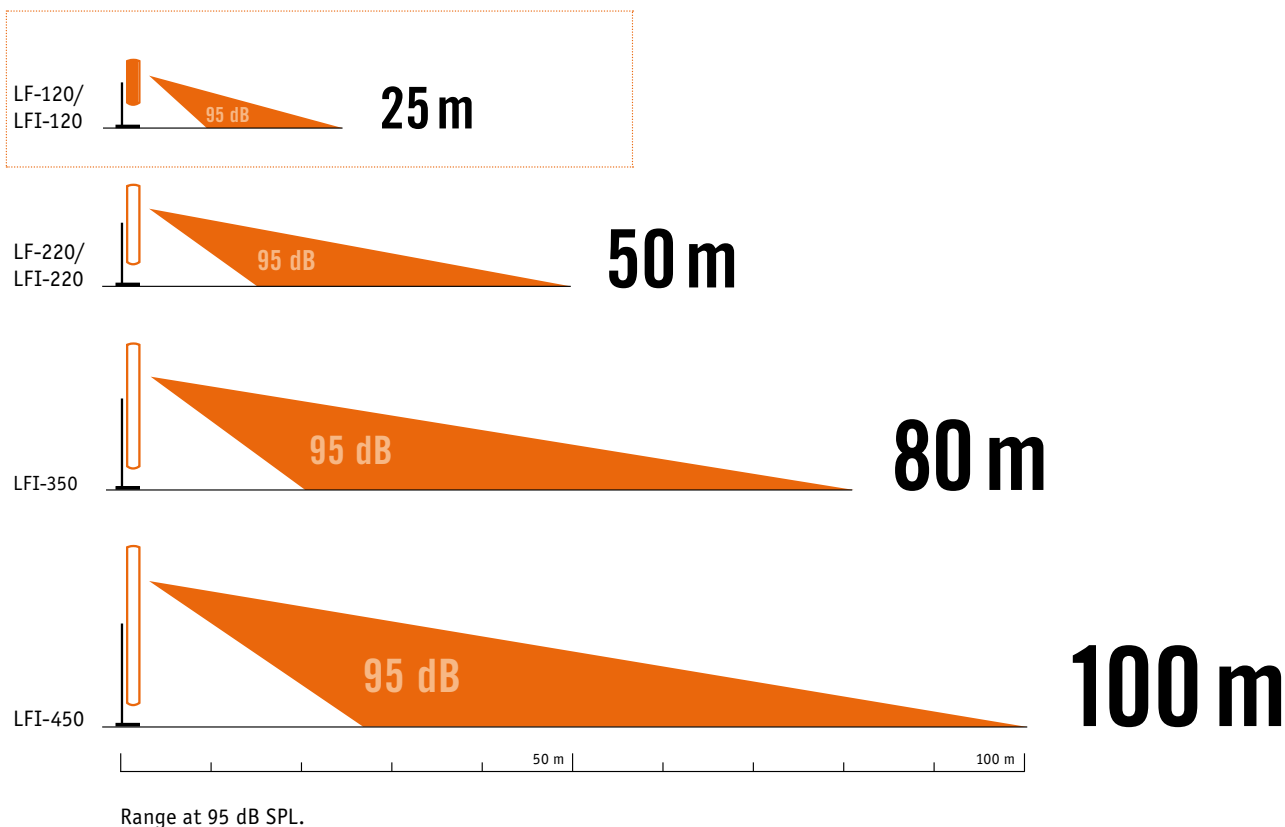

Linea Focus active, electronically steerable line array systems.

Mobile Applications

Press conferences, worship sound, industry events, broadcast and TV shows, galas, exhibition stands, concert tours, theatre productions and more.

With an emphasis on design, architecture and sound quality, Linea Focus systems are ideal for live use where it's important for loudspeakers to maintain a discreet, professional profile, rather than dominating the scene. Quick set-up is another important factor, along with the ability to function flawlessly, even in the most demanding acoustic conditions.


Larger modular line array systems often require flying points and expensive coupling devices, but Linea Focus simply requires a loudspeaker tripod, or a mounting point on a traverse. Due to its array length, Linea Focus provides excellent reach and coverage. The speakers' slim, unobtrusive design allows an unrestricted view of the stage and won't interfere with any camera work. An ability to control the sound direction also avoids potential conflict with any complex microphone set-ups.

Linea Focus systems are light and compact, convenient for both transportation and storage.

- * Low weight (LF-120: 8 kg; LF-220: 15 kg)
- * Elegant design (width: only 13 cm)
- * Connection plates on the underside of the box for quick and easy access
- * Networkable – up to 256 systems

Industry events often take place in venues with difficult acoustic conditions, where the PA system is temporarily installed. Even so, quick set-up, decent appearance, and good sound quality (despite any complex microphone set-ups) are all expected. In these situations Linea Focus copes magnificently, allowing you to control the sound professionally and unobtrusively from a central location, without requiring any additional speaker cabling.


An international study by Prof. Dr.-Ing. Jürgen W. Meyer (Physikalisch-Technische Bundesanstalt, Germany) has revealed that historical churches often have long reverberation times in the particular frequency range relevant to speech. Strong reverb considerably reduces speech intelligibility. Here however, Linea Focus proves a real problem solver. By targeting the sound directly towards the audience, speech intelligibility is significantly improved.

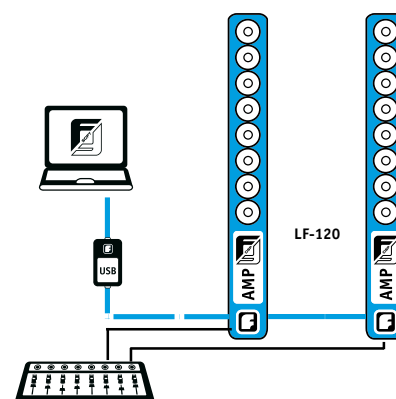

INSIDE LINEA FOCUS.

MADE IN GERMANY. MADE BY FOHHN.

TECHNOLOGY
BY FOHHN®

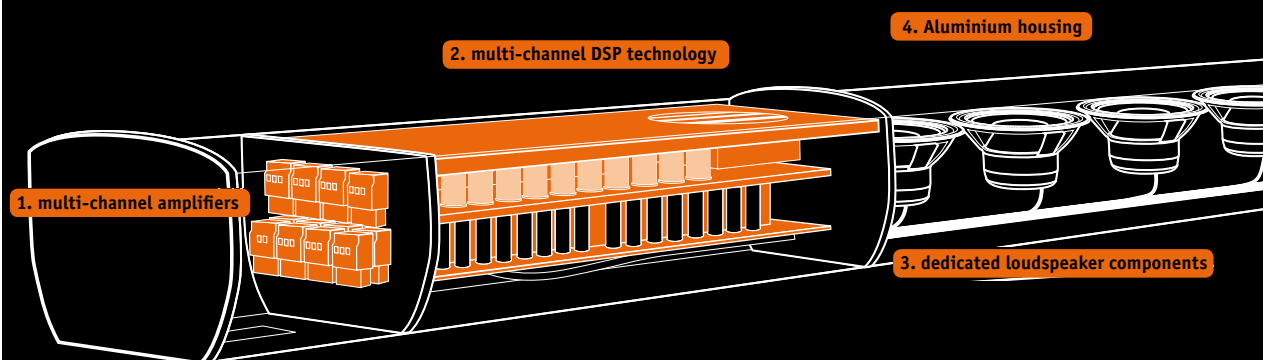

1 Fohhn CLASS D multi-channel amplifiers

State-of-the-art digital amplifier technology – made in Germany. Equipped with 8/16/24/32 separate amplifier channels and specially developed to allow individual control of each loudspeaker chassis. 100 W path power per channel. Superb sound characteristics and extremely high efficiency levels. Minimum heat generation. Maximum operating reliability.

2 Fohhn multi-channel DSP technology

Up to 32 separate DSP channels enabling individual loudspeaker control. Latest DSP processors: 24-Bit AD converter, filter depth 56 Bit, sampling rate / fine tilt control, 96 kHz, latency 0.6 ms. Ultra-fine, precise control in 0.1° steps up to 15 kHz. Integrated, freely-configurable audio devices including parametric EQ, dynamics, delay, noise gate, hi pass / low pass, status monitoring. All settings can be saved as presets.

3 Fohhn dedicated loudspeaker components

Manufactured especially for Fohhn. Extremely high-performance 4" loudspeakers equipped with the latest neodymium drivers and plastic coated membranes. Excellent reproduction in all frequency ranges – bass, mid and high. Exceptionally powerful top end performance, not normally possible with conventional high-frequency drivers.

4 Aluminium housing

Fohhn's high quality aluminium housing is extremely elegant and robust, offering optimum protection for all internal components. Black anodized housing is supplied as standard. Other RAL colours are available on request.

Linea Focus active, electronically steerable line array systems.


The main operating principle

Operating a Linea Focus system is easy, even though there are highly complex processes integrated into both the technology and the software.

The diagram gives more experienced readers an overview of the functionality. An input signal initially passes through the input section. This has a priority logic that is activated if an evacuation announcement is necessary for example, ensuring maximum safety in any kind of emergency. The input signal also passes through a digital signal processor, which offers a range of opportunities for real-time processing. This is done easily and intuitively using Fohhn Audio Soft software. The "Speaker Setting and Protection DSP" section includes all the necessary acoustic protection mechanisms, such as a finely tuned multiband limiter. Equalizer settings, for the array correction for example, can also be stored.

The system is continually optimized to deliver excellent acoustic results and maximum operating reliability, even under difficult conditions. At the heart of the Linea Focus system is the "Beam Control DSP" display, which includes all the algorithms for calculating the beam characteristics. Any parameter changes made by the user in the software are then sent to the Beam Control DSP, which calculates the data and relays the appropriate information to each separate speaker.

Each chassis is controlled via an individually calculated signal from its own Class D power amplifier. Constant monitoring of the state of each individual output signal and component, such as temperature, current and load, means that the present operating status is always displayed and can be read by the user.

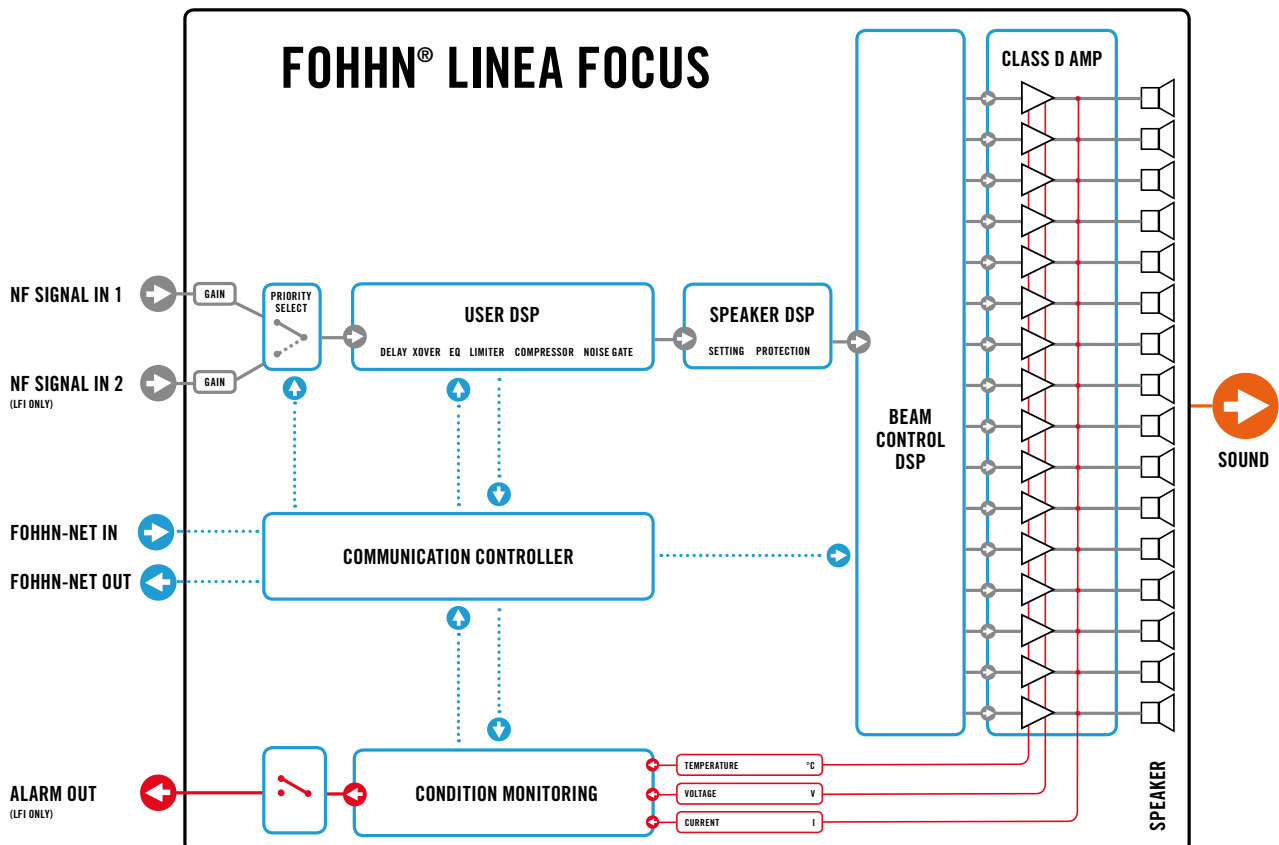

Intuitive beam control in realtime. Operated via mouse wheel.

Fohhn Audio Soft V3

Intuitive, real-time control. All settings can be saved as presets. Innovative technology and its related software have been developed in tandem by Fohhn's engineering team. No other software program is needed. Everything can be controlled from a single application – Fohhn Audio Soft V3 – running on a laptop. The software can be downloaded free of charge from: www.fohhn.com.

The transparent, graphic user interface allows quick access to the connected audio devices, sound presets and the Linea Focus simulation. All settings can be saved as presets. Signal processing is always done in real time. Operating status, time and temperature can also be controlled via the software. The system components and laptop can either be linked via Fohhn USB adapter or Fohhn Ethernet adapter. Up to 256 devices can be networked together.

Linea Focus Simulation


At the Heart of Fohhn Audio Soft V3.


At the heart of Fohhn Audio Soft V3 is the Linea Focus Simulation. The unique integration of control and simulation allows the immediate transfer of parameter settings to the connected devices. All parameter changes made in the simulation window are transferred to the devices in real time. Changes to the sound inclination angle or beam width are instantly audible. The vertical sound inclination angle can be adjusted between $+40^{\circ}/-40^{\circ}$ and the vertical beam width between 0° to 90° .

The simulation of the line array's sound dispersion characteristics lies within a frequency range of 50 Hz – 20 kHz. The spatial distribution of the sound pressure level is displayed in graded colours. The frequency response at any given position, and the sound pressure level for any area of the audience, can be displayed on a graph. Optimizing the sound dispersion characteristics can always be done in real time. Using a laptop with WLAN lets the user move around, quickly assess and optimize the sound in each part of the room, before comparing it again with the simulation.



Configuration

 To configure the Linea Focus the Fohhn Audio Soft V3 is indispensable. For connecting it to a PC the Fohhn-Net Adaptor NA-1 or NA-3 is necessary.

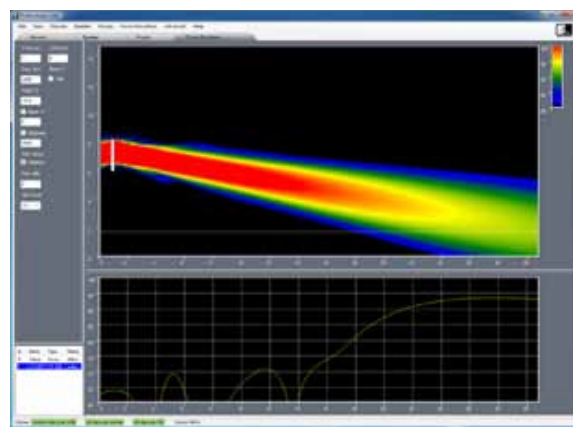

Intuitive beam control in real time.

All settings can be saved as presets.



The software can be downloaded free of charge from:
[www.fohhn.com / Downloads](http://www.fohhn.com/Downloads)

DSP AND SOFTWARE

TECHNOLOGY

TECHNOLOGY
BY FOHHN®

Electronically controlled sound dispersion

The „acoustic beam/focus“ position and the beam width can be adjusted vertically using Fohhn Audio DSP technology combined with Fohhn Audio Soft V3 without having to steer the speakers mechanically. These features open up a whole new range of opportunities to sound planners and integrators for the discreet visual integration of speakers into the room architecture.

The first scientific analysis of the sound dispersion characteristics of speaker arrays were performed as early as the 1920s. Unfortunately DSP technology had not yet been invented at that time. (Publication: Wolfe, I. & Malter, L., „Directional Radiation of Sound“, J. Acoustical Society of America, volume 2, number 2, p. 201 (1930).)

Overlapping sound sources such as a closely arranged series of speakers inside a vertical housing (e.g. in a line array speaker) results in the vertical concentration of sounds over a large frequency range. The taller the line array speaker, the more accurately sounds can be concentrated, irrespective of the frequency. As a result, Linea Focus systems are available in different lengths.


If each individual speaker within this line array speaker is controlled electronically, the directional characteristics can also be manipulated, which allows the „acoustic beam/focus“ to be steered. However, the interactive optimisation of the sound dispersion characteristics in realtime, for example, requires highly complex technology.

Sub arrays


In the future it will be possible to calculate and electronically control specific dispersion characteristics of clusters consisting of subwoofers using Fohhn Audio Soft V3 control and simulation software combined with Fohhn® DSP amplifiers.

Listening experience


We would be glad to demonstrate the features of our Linea Focus systems to you. Experience specific, precision sound dispersion with the Linea Focus!

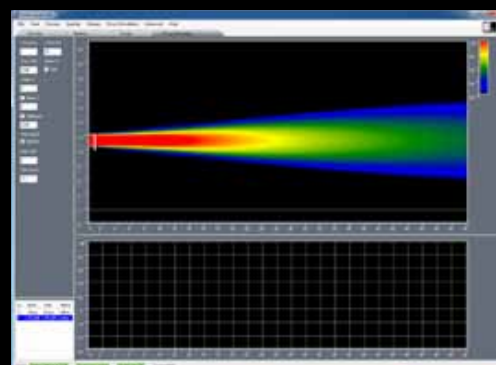

Vertical dispersion of 0 degrees

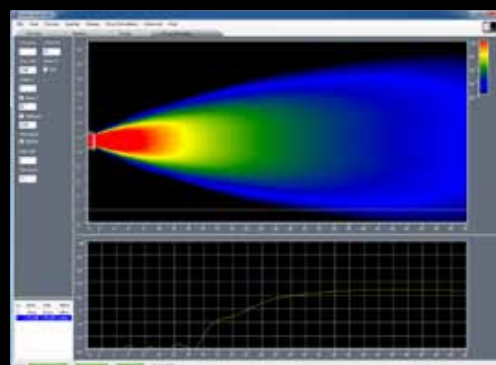

Vertical dispersion of 60 degrees

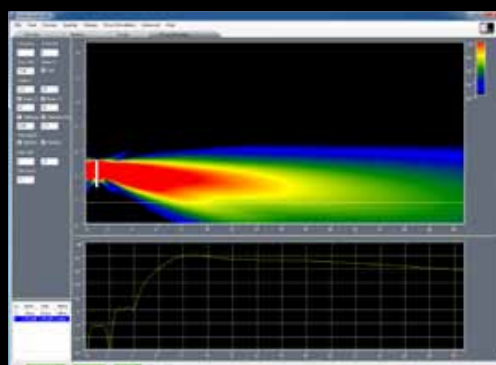


Asymmetrical Beam

Intuitive beam control in realtime. Operated via mouse wheel.

TWO BEAM TECHNOLOGY


The Linea focus system with “two beam technology” developed by Fohhn can generate 2 dispersion beams in the vertical dispersion range. A speaker system can direct sound at a specific area of the dance floor or gallery as a result.

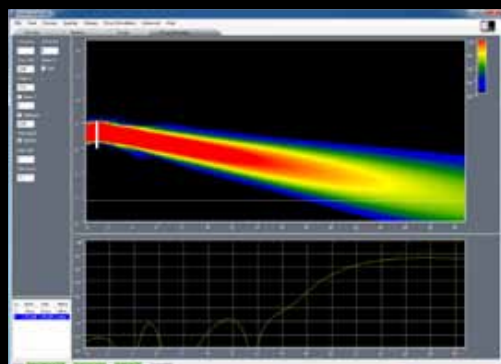


1 Beam

SIDE LOBE FREE TECHNOLOGY


This specially developed algorithm can suppress unwanted side lobes.

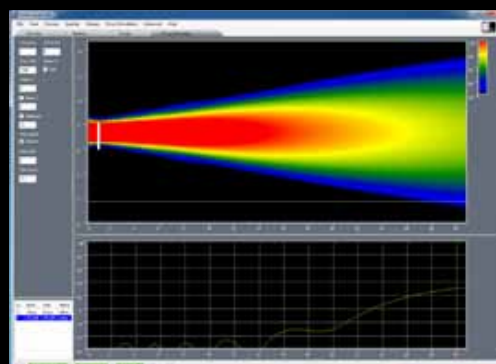


Beam without Side Lobes

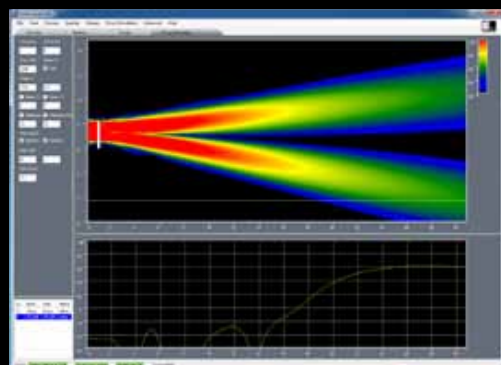

2 Beams

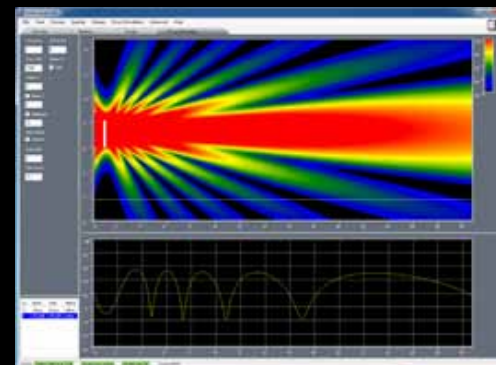

Beam with Side Lobes

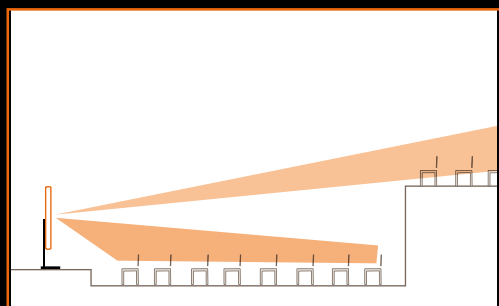

Linea Focus active, electronically steerable line array systems.

Optional subwoofer

Fohhn® DSP processor technology modulates the Linea Focus and Fohhn subwoofers perfectly. Digital Fohhn signal processors are integral components of active Fohhn subwoofers, Fohhn DSP amplifiers and Fohhn DSP controllers. DSP-controlled Fohhn devices can be controlled remotely from a central location in the room or on the stage via intuitive remote control units. Fohhn therefore offers a perfectly adapted sound system that fulfils all the requirements of a modern speaker system regarding design, sound quality and operating comfort in every respect.


Connections

All connections are fitted flush to the back plate for protection on bottom of LF-120/220.

Input/link: XLR male/female jacks

Power: Powercon mains jack

Network: 2x Fohhn-Net connection jacks

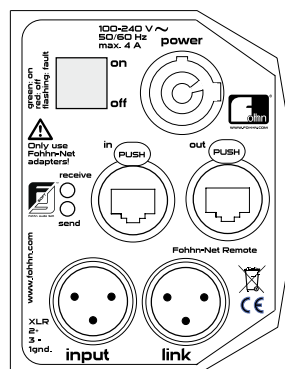

Scope of benefits at a glance

- + 8 or 16 integral digital amplifiers and digital signal processors
- + Beam control in realtime (depends on the speakers's length)
- + DSP mini line array, no side lobes
- + Vertical dispersion control function
- + Dual-beam technology
- + Integral protective circuits for maximum operating safety
- + High degree of speech intelligibility in rooms with difficult acoustics
- + Suitable for reproduction of music using Fohhn subwoofers in a system
- + Aluminium housing with slim, discreet design
- + Low weight
- + No mechanical steering of speaker necessary
- + Discreet integration in the room architecture
- + Integral DSP control for:
 - + Vertical dispersion monitoring
 - + Beam angle
 - + Inclination angle
 - + Acoustic focus
 - + 10-band fully parametric equaliser
 - + Volume control
 - + Internal Delay up to 350 ms / 120 m
 - + Customised preset selection
 - + Compressor/limiter
 - + Extensive group functions
- + Fohhn Net remote connection
- + Intuitive operating software for configuring all parameters and focus simulation using version 3 of Fohhn Audio Soft or later
- + Option of integration in media controls
- + Complex remote control and monitoring via Fohhn Net
- + Comprehensive range of mounting accessories
- + For mobile applications and fixed installation
- + Easy servicing due to superior design
- + German Quality - Engineered and made by Fohhn®

LF-120 electronically steerable line array speaker

Technical specifications LF-120

electro-acoustical features

acoustic design	electronically steerable line array speaker
components [*]	8x 4" impreg. speaker membranes (fully neodymium)
operating mode	active, 8-channel DSP amplifier, class D
sensitivity ^[4]	106 dB
power rating (peak) ^[3]	124 dB
frequency range ^[5]	60 Hz - 17 kHz
nominal dispersion [6]	
horizontal	110°
vertical dispersion, electronically steerable	0° - 90° in 0.1° steps
vertical sound inclination angle, electronically steerable	-40° - +40° in 0.1° steps
Acoustic centre	for both beams this can be set anywhere from 0% (at the bottom of the column) to 100% (at the very top)

features

enclosure	Aluminium design
protection grille	ball impact resistant metal, powder coating
suspension points	6x M6 thread
standard colours	black or white powder coating
front design	metal grille in enclosure colour
dimensions (W x H x D)	130 x 1250 x 120 mm
weight ^[7]	8 kg

optional features

optional colours	all RAL-colours
------------------	-----------------

electronic performance

amplifier output	8x 100 W
amplifier type	Pure Path Digital PWM
audio input	1x XLR
audio output	1x XLR
DSP channels, Fohhn Audio DSP	8
amplification	25 dB
input sensitivity	1,4 V
frequency response	20 Hz - 20 kHz
S/N Ratio	>105 dB/A
protective circuit	soft start, temperature monitoring, short-circuit protection, overload
power supply	100 V - 240 V AC 4A 50/60 Hz power supply with Power Factor Correction
current consumption	standby 5 W, max 400 W
low power	Green Power Standby Mode
temperature range	0 - 40°C
cooling	temperature-controlled fan
weight electronic	ca. 2 kg

remote control and simulation

remote control	Fohhn-Net, Fohhn Audio Soft
remote monitoring	temperature, protect, signals, power supply Fohhn-Net, Fohhn Audio Soft
simulation beam	Fohhn-Net, Fohhn Audio Soft

controller

digital signal processors	2
independent limiters	4
selective 3-band limiting	bass/ mid/ high
band specific time constants	
filter technology	56-bit double precision
AD	24 bit/ 96 kHz
FIR filters	
gain	-80 dB - +12 dB
volume	-80 dB - +12 dB
EQ	10-band parametric EQ gain +/-12 dB frequency range 10 - 20 kHz Q 0,1 - 100

limiter compressor

noise gate	
X-Over	Linkwitz-Riley 4. order 24 dB/ octave high pass 10 Hz - 20 kHz low pass 10 Hz - 20 kHz
delay	0,01 - 350 ms, or 3,4 mm - 120 m

controls

power on/ off button illuminated (standby)	green = on, red = standby red flashing = fault
network control	receive/ send remote control LED
Fohhn-Net connector socket	2x in/ thru
mains	1x Powercon mains jacks
audio input	1x XLR
audio output	1x XLR

CAAD simulation data

simulation data	EASE
-----------------	------

The manufacturer reserves the right to make technical modifications according to legal regulations stipulating the continual improvement of product features.

^[3] Peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range

^[4] 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 meter under anechoic fullspace conditions

^[5] -10 dB under anechoic halfspace-conditions

^[6] horizontal x vertical at -6 dB

^[7] net weight without optional equipment

Remote control and network ability of Fohhn devices with integrated DSP

FR-10

Remote control wall panel designed for the remote operation of Fohhn devices with integrated DSP.



Description

The FR-10 is a wall mount remote control module designed for the remote operation of Fohhn DSP amplifiers, DSP controllers and active Fohhn speakers systems. The FR-10 is extremely easy to operate because the controls are so well arranged. It is virtually impossible for the end customer to make operating errors because the only operating elements are the 8 labelled buttons.

Easy handling

Control up to 32 Fohhn devices individually with this stylish FR-10 wall panel. 8 programmable buttons can be configured to control the overall volume of a system, the volume in different zones or presets for different room effects, for example. The system also has a special function that confirms whether all commands have been executed successfully. The buttons indicate this by changing red or green shortly after they are pressed. For example, if a device is not switched on, the button changes red to indicate that a command could not be executed. This additional monitoring function ultimately contributes to the overall operating reliability of your system. The wall panel is easy to configure using a standard computer with intuitive Fohhn-Net Remote software installed.

Connections

Two terminal strips (paralleled). Alternative connection via standard 4-wire telephone cable.

Applications

The FR-10 is ideal for training rooms, hotels, churches, halls, restaurants or any venue where a simple, efficient system is required to control your audio equipment from a central location. The FR-10 is also ideal for projects where complex media control systems are not viable or inappropriate, but the user wishes to control the speaker system centrally.

FR-20

19" remote control unit can be controlled via conventional external buttons or switches.



Description

The FR-20 can be controlled via conventional external buttons or switches (e.g. Jung, Vitra, etc.) or switching contacts (e.g. media control system). Buttons and switches may come in the form of a wall installation module or an individually manufactured control panel, for example.

Presets stored in the connected Fohhn DSP devices are activated simultaneously and settings for different scenarios such as speech, music, empty room, full room, etc are loaded when the buttons/switches are pressed. You can also adjust the volume quickly and easily in 1 dB increments using the FR-20. A maximum of 31 Fohhn devices connected to the network can be activated simultaneously at the press of a single button.

Integration in a media control system

The FR-20 allows the convenient integration of all DSP-controlled Fohhn devices into media control systems (e.g. AMX, Crestron) by means of 8 switching contacts or RS-485 interface.

Integration in a EIB bus technology

One building, one concept, one system.

Fohhn systems equipped with a FR-20 distribution switch comply with the „European installation bus technology“ standard, including all operating comforts.

Applications


The FR-20 is ideal for training rooms, hotels, churches, halls, restaurants, clubs, bars and many other venues.

For simple, reliable remote operation of your audio system without having to install complex, expensive media control systems.




Views of LF-120


Front view

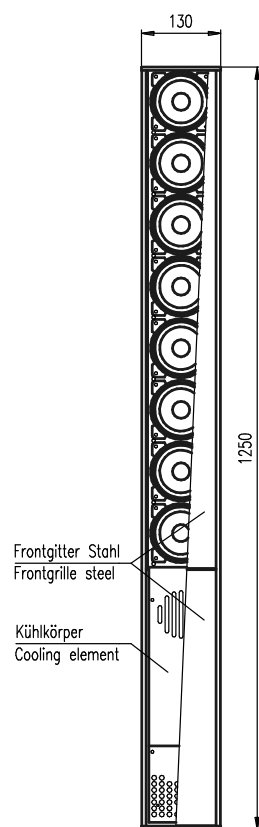


Side view

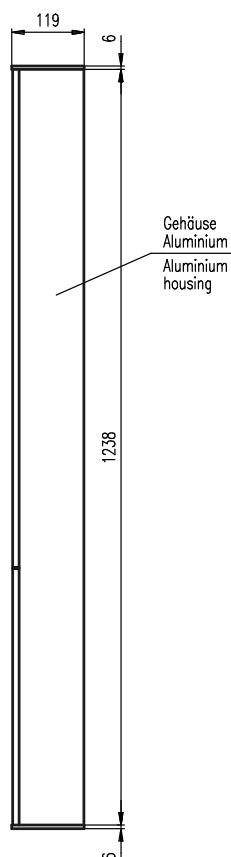


Rear view

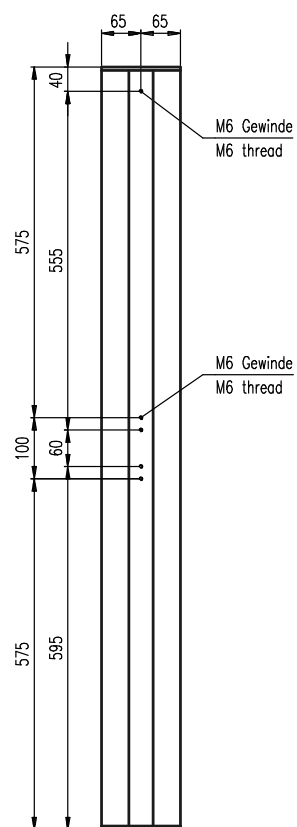

Top view



Bottom view




Accessories for LF-120

WLF-1

Wall bracket for Linea LFI-120/220/350*/450* and LF-120/220

WLF-2

Wall bracket for Linea LFI-120/220/350*/450* and LF-120/220




SA-9

Reducing flange, 36mm dia, for Linea LF-120/220 and LF-120/220, two-piece with spacer, black

SA-10

Flying adapter for traverse mounting e.g. with optional Clamp LC-50 and TV-spigot with M10 female thread, black, for Linea LF-120/220 and LF-120/220

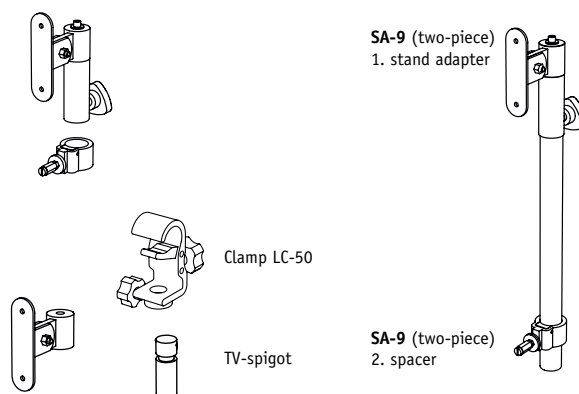

CB-LX-150

Carrying bag for Linea LF-120/LX-150, padded



NA-1 Fohhn-Net Adapter

USB adapter and Fohhn Audio Soft on CD Rom. Extensionable with XLR microphone cable. Aluminium housing and adapter cable.



Overview accessories

	WAL-1	WLF-1	WLF-2	SA-9	SA-10	Carrying bag
LF-120		x	x	x	x	x
LF-220		x	x	x	x	
LFI-120	x	x	x	x	x	x
LFI-220	x	x	x	x	x	
LFI-350		x*	x*			
LFI-450		x*	x*			

* For secure mounting of LFI-350/450 two pieces of WLF-1/2 are necessary!

Linea Focus Free Stand Designer Stands

PERFECT STAND. PERFECT LOOK.

Whether for fixed installation or mobile use, Fohhn's Free Stand designer loudspeaker stands ensure that Linea Focus systems integrate perfectly into any room architecture.

A large detachable base, an elegant plinth or a Fohhn subwoofer will all provide the necessary support for the stand, the stand is available in three heights:

- * Free Stand IX – 0.60 m
- * Free Stand X – 1.25 m
- * Free Stand XI – 2.25 m

Speaker cables can be concealed within the stand itself. The base has a series of connection sockets, which are covered. This allows the cabling to remain "invisible".

- * Perfect integration into any room architecture
- * Elegant, unobtrusive design
- * Sturdy, safe support for Linea Focus speakers
- * Quick assembly
- * Excellent workmanship "Made in Germany"
- * Available in the same RAL colours as loudspeakers

FREE STAND IX / X / XI

Stand LF-1

Large detachable base, designed for use with the stand column IX/X/XI, Linea Focus

Stand LF-2

Wooden plinth, smooth finish, designed for use with the stand column IX/X/XI, Linea Focus

Sub Adapter LF-3

Steel plate with M20 screws for connecting the stand column IX/X/XI auf Fohhn Subwoofer, Linea Focus

Free Stand IX


Aluminium stand column, 60 cm length, for use with Linea Focus systems

Free Stand X

Aluminium stand column, 125 cm length, for use with Linea Focus systems

Free Stand XI


Aluminium stand column, 225 cm length, for use with Linea Focus systems

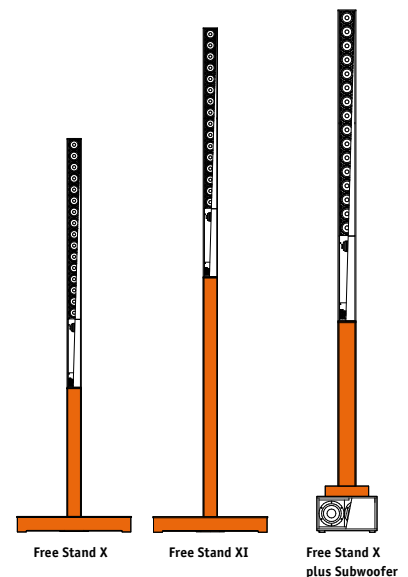


WLF-1 and LF-120

Wall mount


Side view

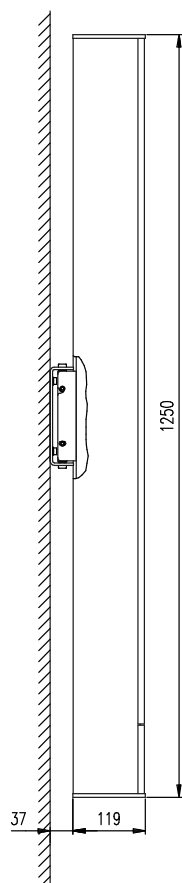

Rear view

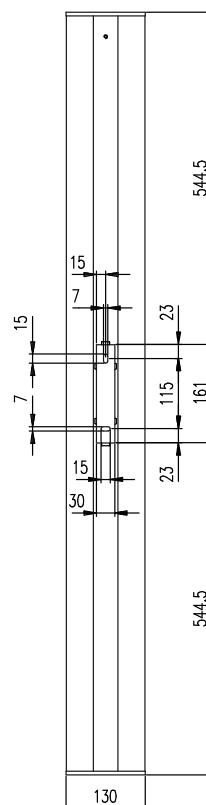


Top view = Bottom view

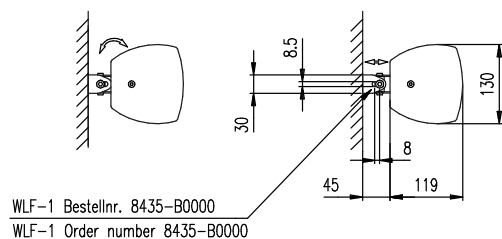


WLF-1

Wall mount



Side view

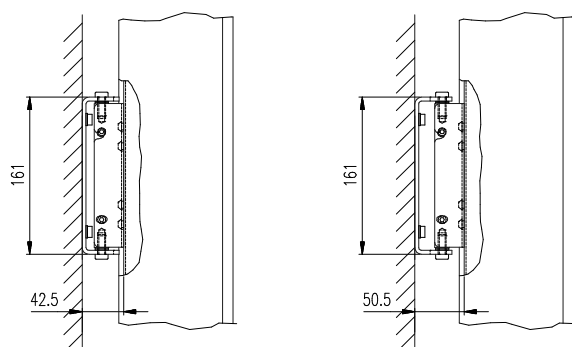

Rear view



Top view = Bottom view

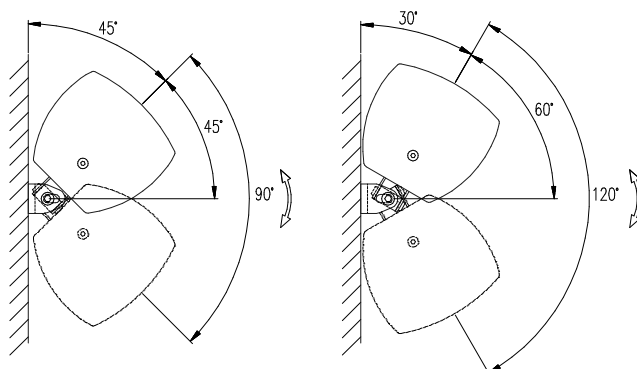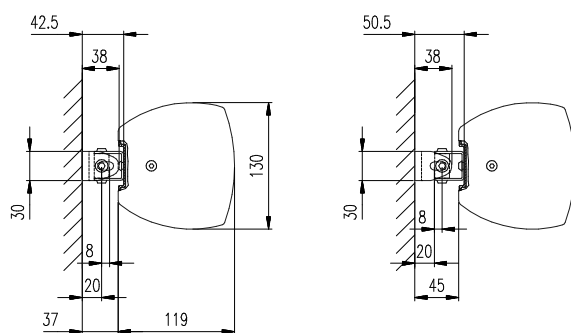



Side view




WLF-2

Wall mount


Side view

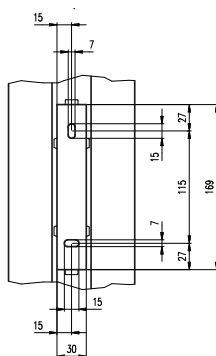


Rear view

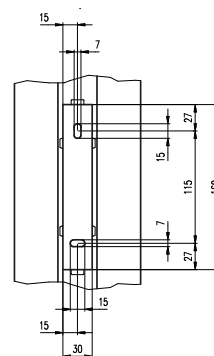

Top view = Bottom view




WLF-2 Bestellnr. 8438-80000
WLF-2 Ordernumber 8438-80000




SA-9 for LF-120

Stand mount


Side view

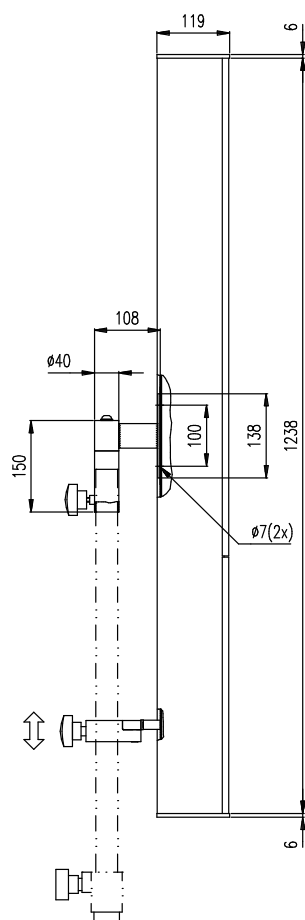

Rear view

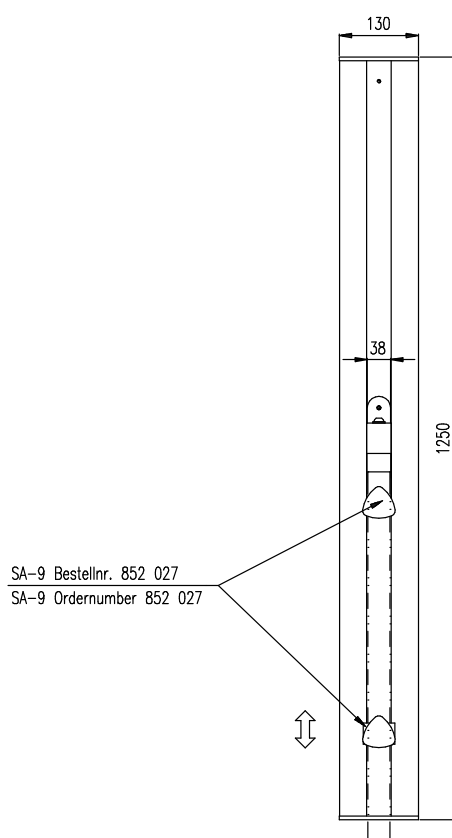


Top View




SA-10 for LF-120

Flying adapter


Side view

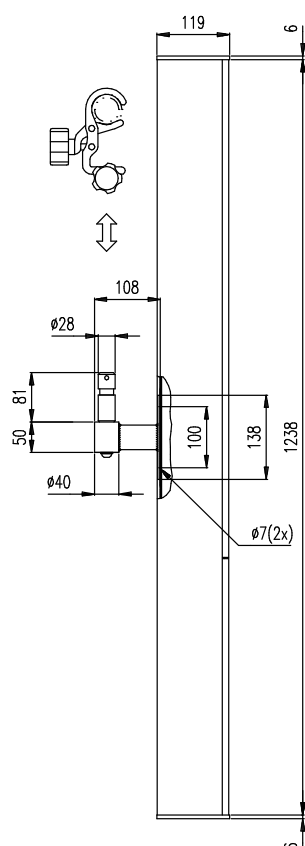

Rear view

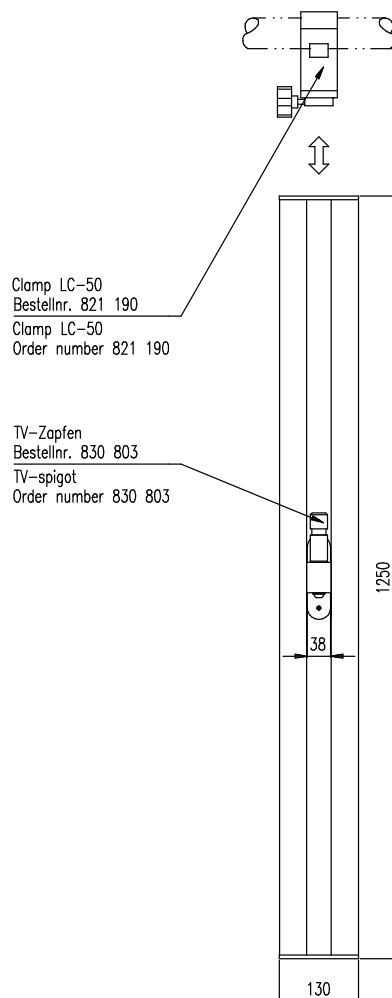

Top View



Tender specifications LF-120

Electronically steerable active line source speaker for mobile applications

Powerful active, electronically steerable line source speaker with aluminium enclosure, equipped with eight coated, long stroke 4" – drivers and digital 8-channel DSP amplifiers. Because of the application of neodymium chassis and an aluminium enclosure, the speaker remains light with only 8 kg. Perfectly suited for dynamic speech- and music transmissions in rooms with demanding acoustics, long reverberation times and challenging architecture. The eight integrated digital amplifiers with 100 W each generate acoustic pressure of maximal 1124 dB. The speaker has a wide frequency range of 60 Hz to 17 kHz. The horizontal dispersion of 110° and the adjustable vertical sound inclination angle of 0° to 90° in steps of 0,1° allow an exact adjustment onto the audience. The inclination angle of the beam can be adjusted from + 40° to - 40° in steps of 0,1°. The Linea focus system can generate two dispersion beams and is therefore able to reach additional areas such as galleries. It is possible to high-pass filter the beams separately. The acoustic centres of both beams can be set anywhere from 0% (at the bottom of the column) to 100% (at the very top), making the speaker suitable for use in the most challenging acoustic conditions. Unwanted side lobes which occur because of interferences are suppressed effectively through a specially developed Optimize-Algorithm. The adjustment of all parameters is controlled in real time with Fohhn Audio Soft V3.0. The handling is easy and intuitive done via mouse click. The dispersion of the speaker, the sound level and the frequency are graphically visualized. Optically appealing, slim and inconspicuous aluminium enclosure with rounded sides, available in black or white powder coating. Optional available in all RAL-colours. For the protection of the speaker chassis and the electronics, the enclosure is equipped with a ball impact resistant, extremely sound-permeable front grille, which is made of powder-coated steel as well as a moisture- and dust repellent acoustic fleece. Highly efficient Green Power supply with a maximum activity input of 5 W in stand-by mode. Six pieces M6 thread applications are integrated to the admission of system brackets. Connections: 1x XLR in, 1x XLR through, 1x Powercon, 2x network RJ45. Specific brackets to assemble the system on ceilings, walls, traverses and stands are optionally available. Simulation data CAAD for EASE available.

electro-acoustical features

acoustic design	electronically steerable line array speaker
components	8x 4" impreg. speaker membranes (fully neodymium)
operating mode	active, 8-channel DSP amplifier, class D
sensitivity	106 dB
power rating (peak)	124 dB
frequency range	60 Hz - 17 kHz
nominal dispersion horizontal	110°
vertical dispersion, electronically steerable	0°- 90° in 0.1° steps
vertical sound inclination angle, electronically steerable	-40° - +40° in 0.1° steps
acoustic centre	for both beams this can be set anywhere from 0% (at the bottom of the column) to 100% (at the very top)

features

enclosure	aluminium design
protection grille	ball impact resistant metal, powder coated
suspension points	6x M6 thread
standard colours	black or white powder coated
front design	metal grille in enclosure colour
dimensions (W x H x D)	130 x 1250 x 120 mm
weight	8 kg

optional features

optional colours	all RAL-colours
------------------	-----------------

remote control and simulation

remote control	Fohhn-Net, Fohhn Audio Soft
remote monitoring	temperature, protect, signals, power supply, Fohhn-Net, Fohhn Audio Soft
Simulation Beam	Fohhn-Net, Fohhn Audio Soft

-----> episode

Tender specifications LF-120

electronic performance

amplifier output	8x 100 W
amplifier type	Pure Path Digital PWM
audio input	1x XLR
audio output	1x XLR
DSP channels, Fohhn Audio DSP	8
amplification	25 dB
input sensitivity	1,4 V
frequency response	20 Hz - 20 kHz
S/N Ratio	>105 dB/A
protective circuit	soft start, temperature monitoring, short-circuit protection, overload
power supply	100 V - 240 V AC 4A 50/60 Hz, power supply with Power Factor Correction
current consumption	standby 5 W, max 400 W
low power	Green Power Standby Mode
temperature range	0 - 40°C
cooling	temperature-controlled fan
weight electronic	ca. 2 kg

controller

digital signal processors	2
independent limiters	4
selective 3-band limiting	bass/ mid/ high
band specific time constants	
filter technology	56-bit double precision
AD	24 bit/ 96 kHz
FIR filters	
gain	-80 dB - +12 dB
volume	-80 dB - +12 dB
EQ	10-band parametric EQ, gain +/-12 dB, frequency range 10 - 20 kHz, Q 0,1 - 100
limiter compressor	
noise gate	
X-Over	Linkwitz-Riley 4. order, (24 dB/ octave), high pass: 10 Hz - 20 kHz, low pass: 10 Hz - 20 kHz
delay	0,01 - 350 ms (or 3,4 mm - 120 m)

controls

power on/ off	button illuminated (standby): green = on, red = standby, red flashing = fault
network control	receive/ send remote control LED
Fohhn-Net connector socket	2x in/ thru
mains	1x Powercon mains jacks
audio input	1x XLR
audio output	1x XLR

CAAD simulation data

EASE

Make

Fohhn Audio AG




Type

LF-120

SOUNDS PERFECT. is PERFECT.

Fohhn audio systems. The ultimate all-round audio experience.



 German quality
 engineered and made
 by Fohhn®

Fohhn Audio AG

Hohes Gestade 3-7
72622 Nürtingen
Germany
Tel. +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com