


Focus Slim

FS-110

Aktiv, slimmad källhögtalare med strålstyrning, 8 × 2,5"
broadbandschassi, 117 dB max. SPL, 85 × 1100 × 90 mm

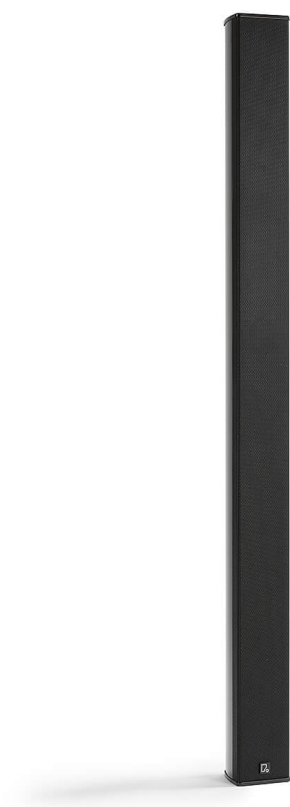

Analog

 Dante™

Focus Slim FS-110

FS-110 är en extra tunn, aktiv linjehögtalare med Fohhn Beam Steering Technology. Detta gör det möjligt att styra ljudstrålen genom att vrida på mushjulet. Focus Slim -serien gör den världsberömda Fohhn-tekniken attraktiv för mindre och mer priskänsliga projekt. Tack vare den kristallklara talöverföringen är systemen idealiska för högklassiga konferensrum, föreläsningssalar och små till medelstora kyrkor.

Main features

- 8 × 2,5" bredbandschassi med koaxiala Fohhn-diffraktionsvågledare
- 8 integrerade Fohhn DSP -förstärkare med 75 W vardera.
- 117 dB max. SPL
- Integrerat basreflexsystem
- Mycket bred horisontell spridning på 140°.
- Vertikal spridning kan kontrolleras i realtid via Fohhn Audio Soft
- Vertikal strålbredd: 0° till 90°, ljudets lutningsvinkel: -40° till +40° (justeras i steg om 0,1°).
- Akustiskt centrum kan flyttas över hela linjelängden.
- Fohhn Two Beam Technology (två oberoende spridningsstrålar)
- Fohhn Side Lobe Free Technology (dämpning av sidolober)
- Med analoga ingångar + Dante
- Q-Sys- och Crestron-plugins tillgängliga
- Flexibel montering tack vare T-spår på baksidan
- Endast 8,5 cm bred

Tillgänglig med följande färgalternativ



Svart



Vit

Utrustad med följande Fohhn-teknik



Fohhn Texture
Design



Fohhn Beam
Steering
Technology



Fohhn DSP
inside



Specialfärger
valfria



Auto Power
Save

Möjliga ingångsgränssnitt för denna produkt

Analog

 Dante™

För detaljerad information om alla Fohhn-teknologier, färgalternativ och anslutningar, vänligen besök

www.fohhn.com/en/technologies

Tekniska data

Electroacoustic features	
acoustic design	Ultra-compact, electronically controllable line source system, bass reflex
components	8 × 2.5" broadband chassis, water-repellent membrane, with coaxial Fohhn diffraction waveguide
maximum SPL	117 dB
frequency range	62 Hz – 17 kHz
operational mode	active, 8 × DSP amplifier, Class-D
nominal dispersion, horizontal	140°
vertical beam width, digitally controlled	0° to +90° in 0.1° increments
vertical inclination angle, digitally controlled	–40° to +40° in 0.1° increments
acoustic centre	both beams moveable between 0 – 100 % (from speaker bottom to top)
Physical features	
enclosure	aluminum, powder coated
connectors	Dante audio and control with 100Base-TX Ethernet, analog input, mains power, USB-C Config for local configuration
Dimensions without / incl. connection cover (w x h x d)	85 × 1100 × 90 / 100 mm
weight	5.8 kg
standard colours	black or white powder coated
front design	Front grille in enclosure color
protection grille	Steel grille, powder coated, backed with acoustically transparent 3D mesh
mounting points	continuous T-slot at rear
Optional features	
optional colours	RAL Classic / NCS / Pantone on request, Fohhn Texture Design

Electronic features	
amplifier type	Pure Path Digital PWM
support for AES67	yes
DSP channels, Fohhn Audio DSP	8
amplifier power	8 × 75 W
frequency response	20 Hz – 20 kHz
gain	25 dB
input sensitivity	0 dBFS / +4,2 dBV
signal/noise ratio	> 103 dB (A-weighted)
THD+N	0.08 % (1 kHz, 8 ohms, 3 dB below clipping)
dynamic range	> 120 dB
password protection	yes
auto power save	adjustable from 1 s to 12 h, or never active
protective circuit	over voltage protection, over current protection, over temperature protection, short-circuit protection, DC protection, power on delay, soft start and inrush current limit
power supply	100 – 240 V AC 50/60 Hz, universal power supply with power factor correction (PFC)
power consumption	200 W, Idle 15 W, Auto Power Save 4 W, Standby 3 W
power factor (PFC)	> 90 %
temperature range	0 – 40 °C
cooling	fanless, passive
Controller	
FIR filter	yes
gain	–80 dB – +12 dB
volume	–80 dB – +12 dB
EQ input	10 fully parametric filters, Gain +/-12 dB, Frequency 10 Hz – 20 kHz, Q 0.1 – 100
EQ output	10 fully parametric filters, Gain +/-12 dB, Frequency 10 Hz – 20 kHz, Q 0.1 – 100
selective 3-band limiting	bass / mid / high
limiter / compressor	2 × input, 1 × output
noise gate	2 × input, 1 × output
X-over	Linkwitz-Riley 4th order (24 dB/octave), high pass 10 Hz – 20 kHz, low pass 10 Hz – 20 kHz, each 2 × input, 1 × output
delay input	0 – 350 ms (0 – 120 m)
delay output	0 – 640 ms (0 – 220 m)
user presets	100
simulation beam	Fohhn Net, Fohhn Audio Soft
system latency	Dante + 1.2 ms
band-specific time constants	yes
filter technology	80-bit double precision

Remote control and remote monitoring

remote control	Fohhn Audio Soft, Fohhn Net over IP
remote monitoring	temperature, protect, signals, power supply, Fohhn Net, Fohhn Audio Soft
integration in media control	UDP text protocol, Q-SYS Plugin available

Connections and controls

inputs & control	1 × 100Base-TX Ethernet (RJ-45) for Dante audio and control, 1 × terminal for analog audio, balanced 1 × USB-C for control
mains connection	1 × 3-pin terminal (4.0 mm ² rigid / 2.5 mm ² flex)

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
Tyskland

Telefon +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com

