




转换器

ABX-6

Dante 用于冗余光纤以太网连接的分线盒，输入：（光纤）；
输出。，Fohhn , Fohhn NetDante AES/EBU Airea

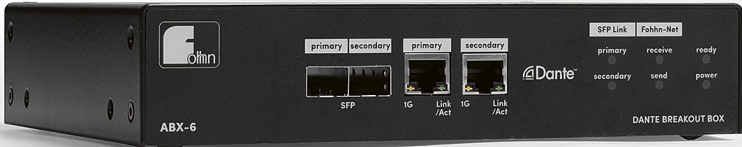

转换器 ABX-6

ABX-6 Dante 分线盒最多可以配备两个1000Base-X光纤收发器（SFP模块）。这允许通过光纤电缆进行冗余应用。此外，它还有两个1000Base-T以太网连接。因此，ABX-6 支持与Focus Venue、Focus Modular 或 Fohhn系统放大器进行长距离的方便连接。



Main features

- 用于1000Base-X光纤收发器的SFP端口(Dante 初级和次级)
- 1000Base-T以太网连接(Dante 初级和次级)
- 多达八个音频通道：2 ×AES/EBU, 2 ×Airea 连接
- Fohhn Net的控制信号是通过以太网传输的
- 综合Dante 布鲁克林II模块
- 可用的Q-SYS插件
- 包括机架的安装支架

有以下颜色可供选择



黑色



配备了以下Fohhn技术



傅汉文Airea

该产品可能的输入接口

AES/EBU

AIREA®

Dante™

技术数据

Physical features	
dimensions (w × h × d)	210 × 44 × 172 mm
Electronic features	
Fohhnt Net output	RS-485
audio inputs	Dante Primary / Secondary
audio outputs	AES/EBU 24 Bit / 48 kHz, Airea Connect
support for AES67	Yes
power supply	100 – 240 V~, 50/60 Hz
power consumption	5 W
integration in media control	UDP and TCP text protocol
Connections	
ethernet	2 × SFP port and 2 × RJ-45
power supply	1 × powerCON
Fohhn Net	1 × RJ-45
AES/EBU output	2 × XLR male
Airea	2 × RJ-45 out
Display LEDs	
ready LED	blue = ready
SFP link LEDs	green = link
power LED	green = on
send LED	Fohhn Net send = yellow
receive LED	Fohhn Net receive = green

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
德国

电话 +49 7022 93323-0
传真 +49 7022 93324-0
www.fohhn.com
info@fohhn.com

