


EasyPort


FP-22 passive

Passive additional speaker for FP-22 modular, 8" / 1", 65 Hz – 20 kHz, 117 dB SPL max., approx. 240 × 510 × 270 mm

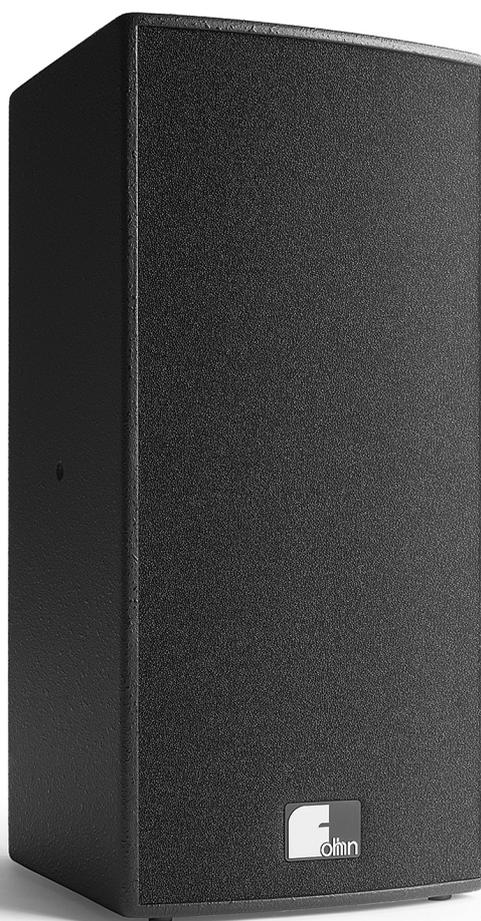

EasyPort FP-22 passive

The EasyPort FP-22 passive is an auxiliary speaker for connection to a FP-22 modular. Their acoustic and design similarities allow the loudspeakers to be easily connected to each other via a Speakon cable. This allows the user to sonicate additional areas, to larger numbers of people.

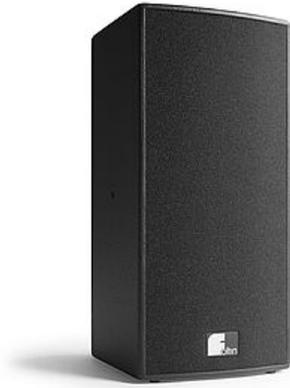

Main features

- Perfectly matched 8" / 1" short horn speaker components
- SPL max. 117 dB
- Very light weight, at around 9 kg
- Available in all RAL Classic colors

Available with the following color options



Black



Equipped with the following Fohhn technologies



Special colors
optional

Technical data

Electroacoustic features

acoustic design	passive loudspeaker system 2-way, vented design
power rating (nominal)	120 watts
components	8" / 1" compression driver with short horn
maximum SPL	117 dB
operational mode	passive (for operation with FP-22 modular)
frequency range	65 Hz – 20 kHz
nominal dispersion (h × v)	100° × 100°

Physical features

enclosure	multiplex birch plywood
dimensions (w × h × d)	approx. 240 × 510 × 270 mm
speaker stand pole	integral, ø 36 mm
weight	approx. 9 kg
standard colours	textured paint, black
handles	1 handle
front design	acoustic foam
mounting points	2 × M8 thread for U-bracket

Optional features

optional colours	RAL Classic / NCS / Pantone on request
------------------	--

power rating (nominal/program): according to IEC-60268-5 (long term/short term)

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range, with speaker preset

frequency range: -10 dB under anechoic halfspace-conditions with speaker preset

weight: net weight without optional equipment

nominal dispersion: -6 dB compared to the main dispersion axis

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
Germany

Phone +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com

