


Arc


AT-661w

用于固定安装的全天候无源全频扬声器，2 × 10" / 1.4", 600 W,
138 dB SPL 最大, 455 × 840 × 465 mm

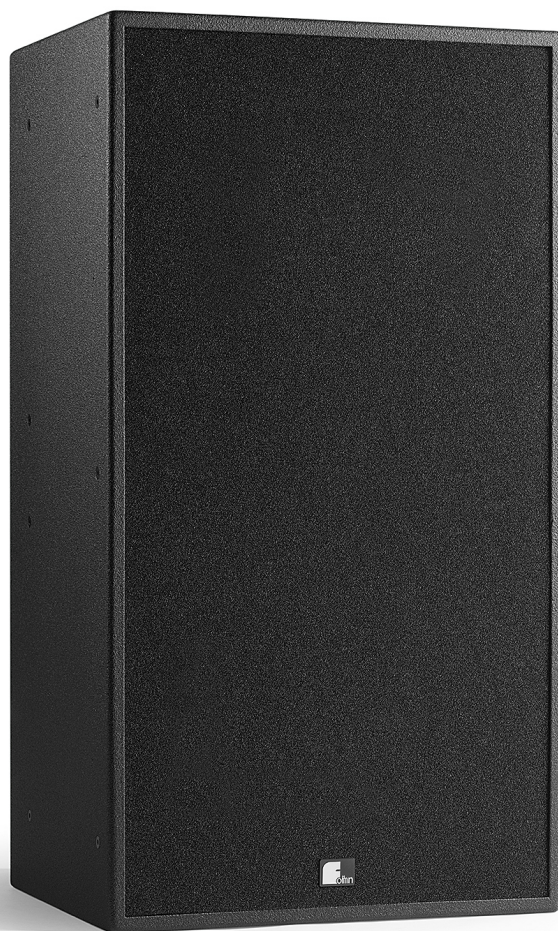

Arc AT-661w

是一个无源、带有全号筒加载的全频扬声器系统。AT-661w是一个无源、号筒加载的全频扬声器系统。它是专门为户外应用而开发的，有一个防风雨的外壳，防水连接和表面防水涂层。它的高性能容量和出色的语言清晰度给人留下深刻印象。

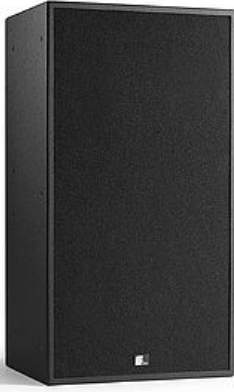

Main features

- 2×10"/1.4 "压缩驱动器（3.5 "膜片），位于可旋转的CD号角上
- 电子高频保护
- 额定功率：600W@4欧姆
- 覆盖角度：90°×60°（H×V）
- 最大声压级:138 dB
- 连接：2×4针端子，带防水密封电缆接头
- 用钢支架加固的防风雨VSM外壳
- 耐用的PU涂层是标准配置
- 可根据要求提供RAL经典色、NCS或Pantone色
- 可根据要求提供防风雨安装选项（由不锈钢制成）。
- 为了确保性能和操作安全，需要使用包括正确的扬声器预置的Fohhn系统放大器。



有以下颜色可供选择



黑色

配备了以下Fohhn技术



100V可选



特殊颜色可选



抗球冲击



可能具有耐候性

技术数据

Electroacoustic features	
acoustic design	passive fully horn loaded point source speaker system, 2-way, vented design, weather resistant
power rating (nominal)	600 watts
power rating (program)	1200 watts
power rating (peak)	2400 watts
components	2 × 10" long excursion with impregnated cone, 1,4" compression driver on rotatable CD-Horn with self-resetting IPC[*]-HF protection, neodymium magnets
sensitivity	105 dB
maximum SPL	138 dB
frequency range	65 Hz – 20 kHz
2-way design	yes
nominal impedance	4 ohms
nominal dispersion (h × v)	90° × 60°
Physical features	
enclosure	weatherproof VSM/aluminum cabinet
connectors	2 × 4-pin terminal with removable watertight cable gland
dimensions (w × h × d)	455 × 840 × 465 mm
weight	approx. 32 kg
standard colours	scratch-proof polyurethane coating, black
weather protection	polyurethane coating and water-repellant speaker cone impregnation
front design	acoustic foam, same colour as enclosure
protection grille	steel grille, ball impact resistant, powder-coated
mounting points	8 × M6 threads
Optional features	
optional colours	RAL Classic / NCS / Pantone on request
integrated 100 V transformer	on request
CAAD simulation data	
simulation data	EASE, Fohhn Designer

额定功率（标称/程序）：根据IEC-60268-5（长期/短期）
额定功率（峰值）；最大声压级：峰值，20毫秒，带通滤波粉红噪声信号，根据IEC 60268-2在频率范围下限以上一个八度，扬声器预设灵敏度。2,83V，8欧姆（2V，4欧姆，4V，16欧姆），距离1米，在全消声空间条件下
频率范围：-10dB，在消声半空间条件下，扬声器预设
重量：净重，不含可选设备
标称频散：与主频散轴相比-6dB

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
德国

电话 +49 7022 93323-0
传真 +49 7022 93324-0
www.fohhn.com
info@fohhn.com

